Planning and Optimization

D5. Delete Relaxation: Relaxed Task Graphs

Malte Helmert and Gabriele Röger

Universität Basel

October 26, 2026

Planning and Optimization

October 26, 2026 — D5. Delete Relaxation: Relaxed Task Graphs

D5.1 Relaxed Task Graphs


D5.2 Construction

D5.3 Reachability Analysis

D5.4 Remarks

D5.5 Summary

Content of the Course

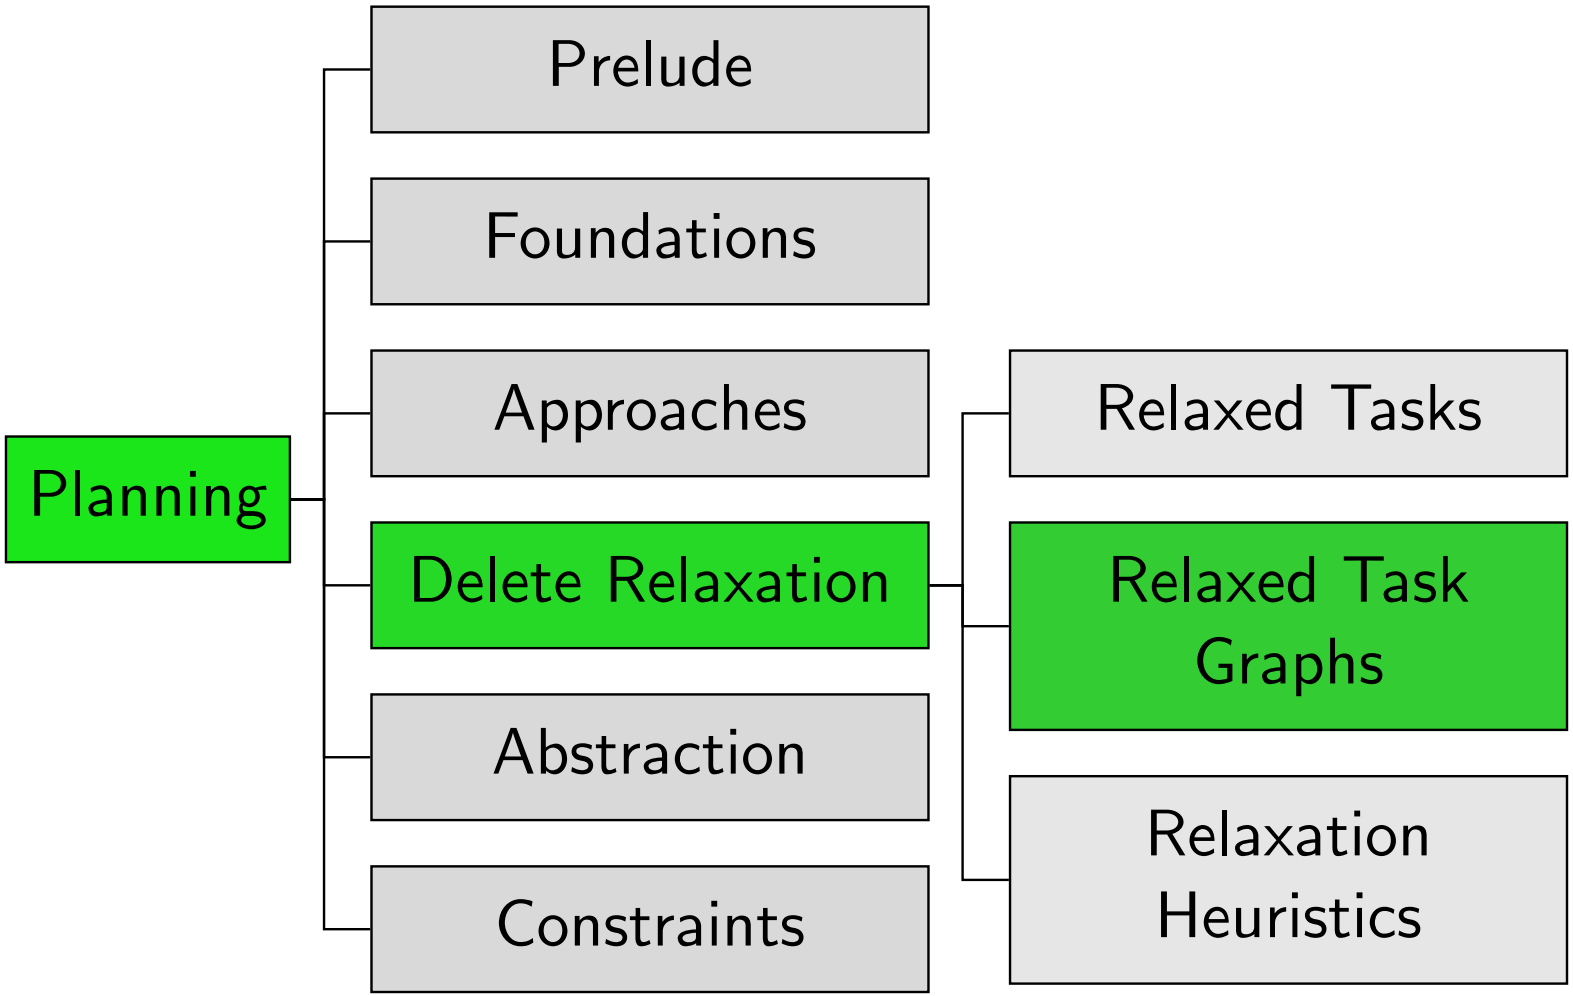

D5.1 Relaxed Task Graphs

Relaxed Task Graphs

Let Π^+ be a relaxed planning task.

The relaxed task graph of Π^+, in symbols $RTG(\Pi^+)$,
is an AND/OR graph that encodes

- which state variables can become true
  in an applicable operator sequence for Π^+,
- which operators of Π^+ can be included
  in an applicable operator sequence for Π^+,
- if the goal of Π^+ can be reached,
- and how these things can be achieved.

We present its definition in stages.

Note: Throughout this chapter, we assume flat operators.

Running Example

As a running example, consider the relaxed planning task $\langle V, I, \{o_1, o_2, o_3, o_4\}, \gamma \rangle$ with

$$
\begin{aligned}
V &= \{a, b, c, d, e, f, g, h\} \\
I &= \{a \mapsto \mathbf{T}, b \mapsto \mathbf{T}, c \mapsto \mathbf{F}, d \mapsto \mathbf{T}, \\
&\qquad e \mapsto \mathbf{F}, f \mapsto \mathbf{F}, g \mapsto \mathbf{F}, h \mapsto \mathbf{F}\} \\
o_1 &= \langle c \vee (a \wedge b), c \wedge ((c \wedge d) \rhd e), 1 \rangle \\
o_2 &= \langle \top, f, 2 \rangle \\
o_3 &= \langle f, g, 1 \rangle \\
o_4 &= \langle f, h, 1 \rangle \\
\gamma &= e \wedge (g \wedge h)
\end{aligned}
$$

D5.2 Construction

Components of Relaxed Task Graphs

A relaxed task graph has four kinds of components:

- Variable nodes represent the state variables.
- The initial node represent the initial state.
- Operator subgraphs represent the preconditions and effects of operators.
- The goal subgraph represents the goal.

The idea is to construct the graph in such a way that all nodes representing reachable aspects of the task are forced true.

Variable Nodes

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

- For each $v \in V$, $RTG(\Pi^+)$ contains an OR node n_v.
  These nodes are called variable nodes.

Variable Nodes: Example

$$V = \{a, b, c, d, e, f, g, h\}$$




Initial Node

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

- $RTG(\Pi^+)$ contains an AND node n_I.
  This node is called the initial node.
- For all $v \in V$ with $I(v) = \mathbf{T}$, $RTG(\Pi^+)$ has an arc from n_v to n_I. These arcs are called initial state arcs.
- The initial node has no successor nodes.

Initial Node and Initial State Arcs: Example

$$I = \{a \mapsto \mathbf{T}, b \mapsto \mathbf{T}, c \mapsto \mathbf{F}, d \mapsto \mathbf{T}, e \mapsto \mathbf{F}, f \mapsto \mathbf{F}, g \mapsto \mathbf{F}, h \mapsto \mathbf{F}\}$$

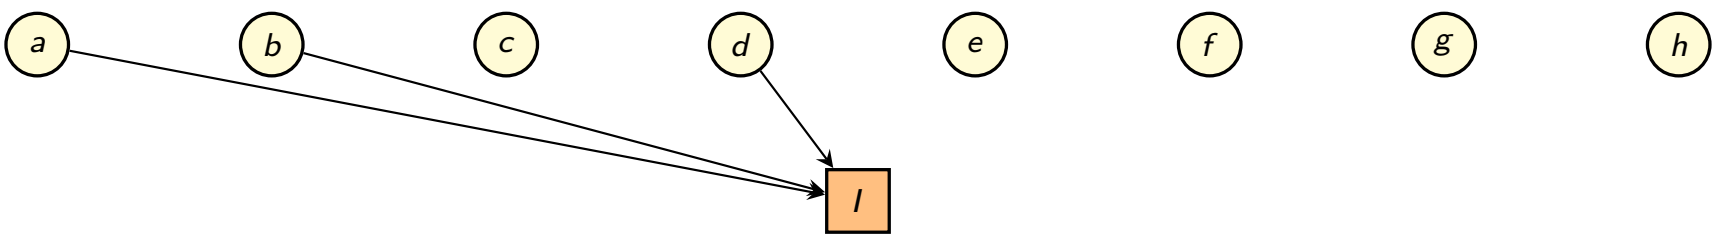

Operator Subgraphs

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

For each operator $o^+ \in O^+$, $RTG(\Pi^+)$ contains an operator subgraph with the following parts:

- for each formula φ that occurs as a subformula of the precondition or of some effect condition of o^+, a formula node n_φ (details follow)
- for each conditional effect $(\chi \rhd v)$ that occurs in the effect of o^+, an effect node $n^\chi_{o^+}$ (details follow); unconditional effects are treated as $(\top \rhd v)$

Formula Nodes

Formula nodes n_φ are defined as follows:

- If $\varphi = v$ for some state variable v, n_φ is the variable node n_v (so no new node is introduced).
- If $\varphi = \top$, n_φ is an AND node without outgoing arcs.
- If $\varphi = \bot$, n_φ is an OR node without outgoing arcs.
- If $\varphi = (\varphi_1 \wedge \varphi_2)$, n_φ is an AND node with outgoing arcs to n_{φ_1} and n_{φ_2}.
- If $\varphi = (\varphi_1 \vee \varphi_2)$, n_φ is an OR node with outgoing arcs to n_{φ_1} and n_{φ_2}.

Note: identically named nodes are identical,
so if the same formula occurs multiple times in the task,
the same node is reused.

Effect Nodes


Effect nodes $n^{\chi}_{o^+}$ are defined as follows:

- $n^{\chi}_{o^+}$ is an AND node
- It has an outgoing arc to the formula nodes $n_{pre(o^+)}$ (precondition arcs) and n_{χ} (effect condition arcs).
- Exception: if $\chi = \top$, there is no effect condition arc. (This makes our pictures cleaner.)
- For every conditional effect $(\chi \rhd v)$ in the operator, there is an arc from variable node n_v to $n^{\chi}_{o^+}$ (effect arcs).

Note: identically named nodes are identical,
so if the same effect condition occurs multiple times
in the same operator, this only induces one node.


Operator Subgraphs: Example

$$o_1 = \langle c \vee (a \wedge b), c \wedge ((c \wedge d) \rhd e), 1 \rangle$$

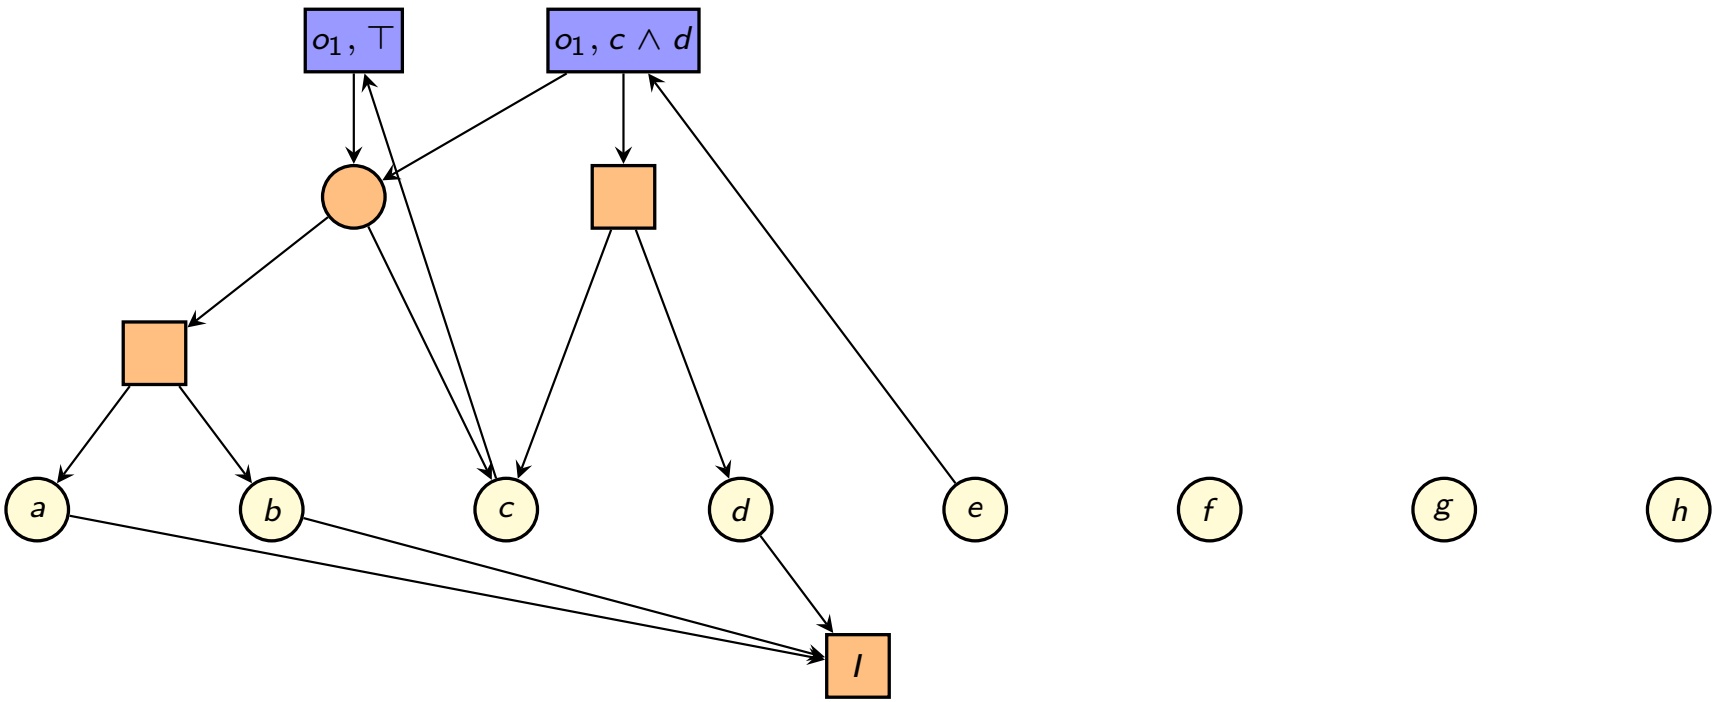


Operator Subgraphs: Example

$$o_2 = \langle \top, f, 2 \rangle$$

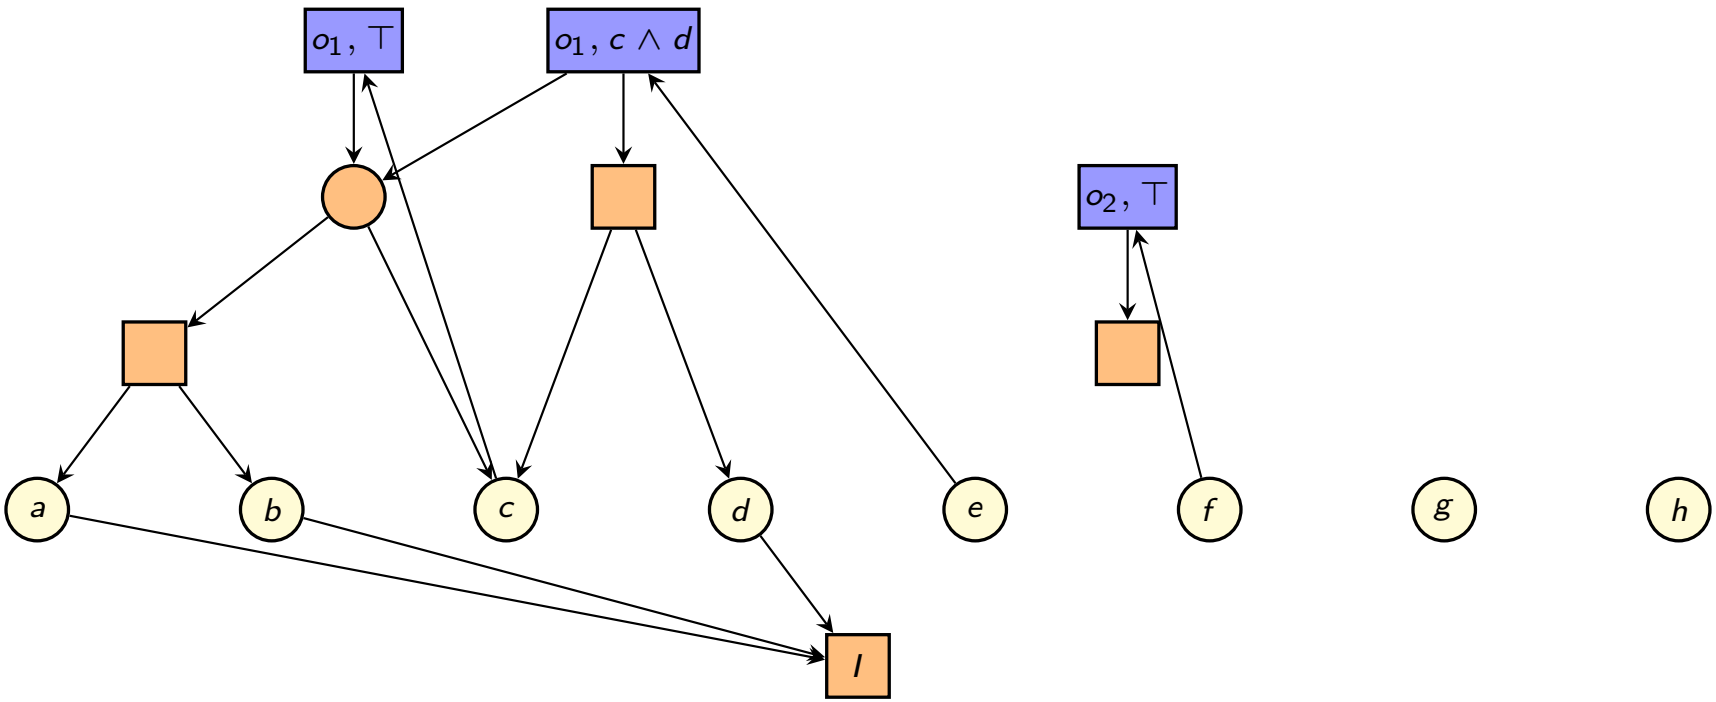


Operator Subgraphs: Example

$$o_3 = \langle f, g, 1 \rangle$$

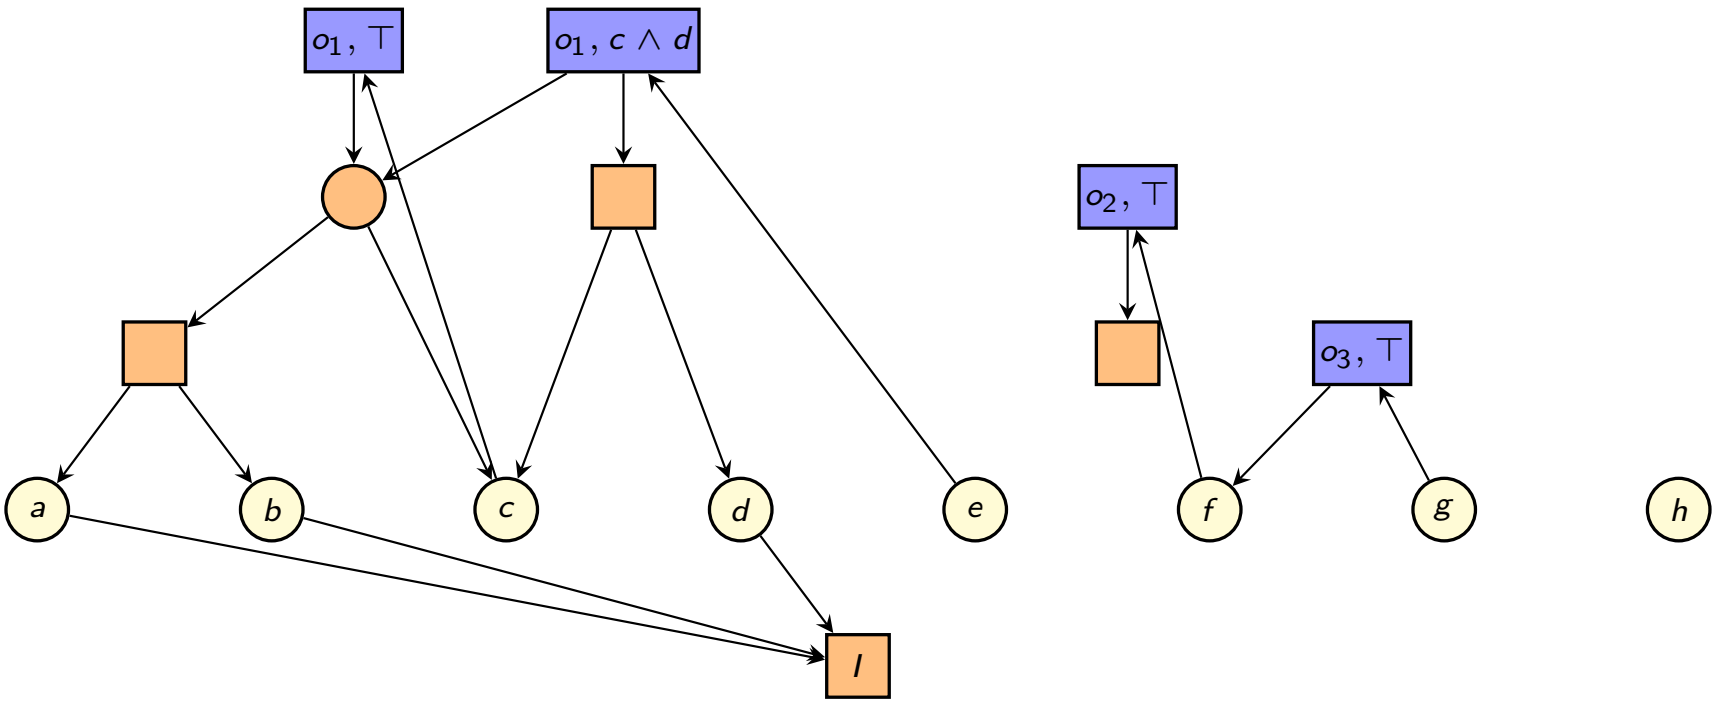

Operator Subgraphs: Example

$$o_4 = \langle f, h, 1 \rangle$$

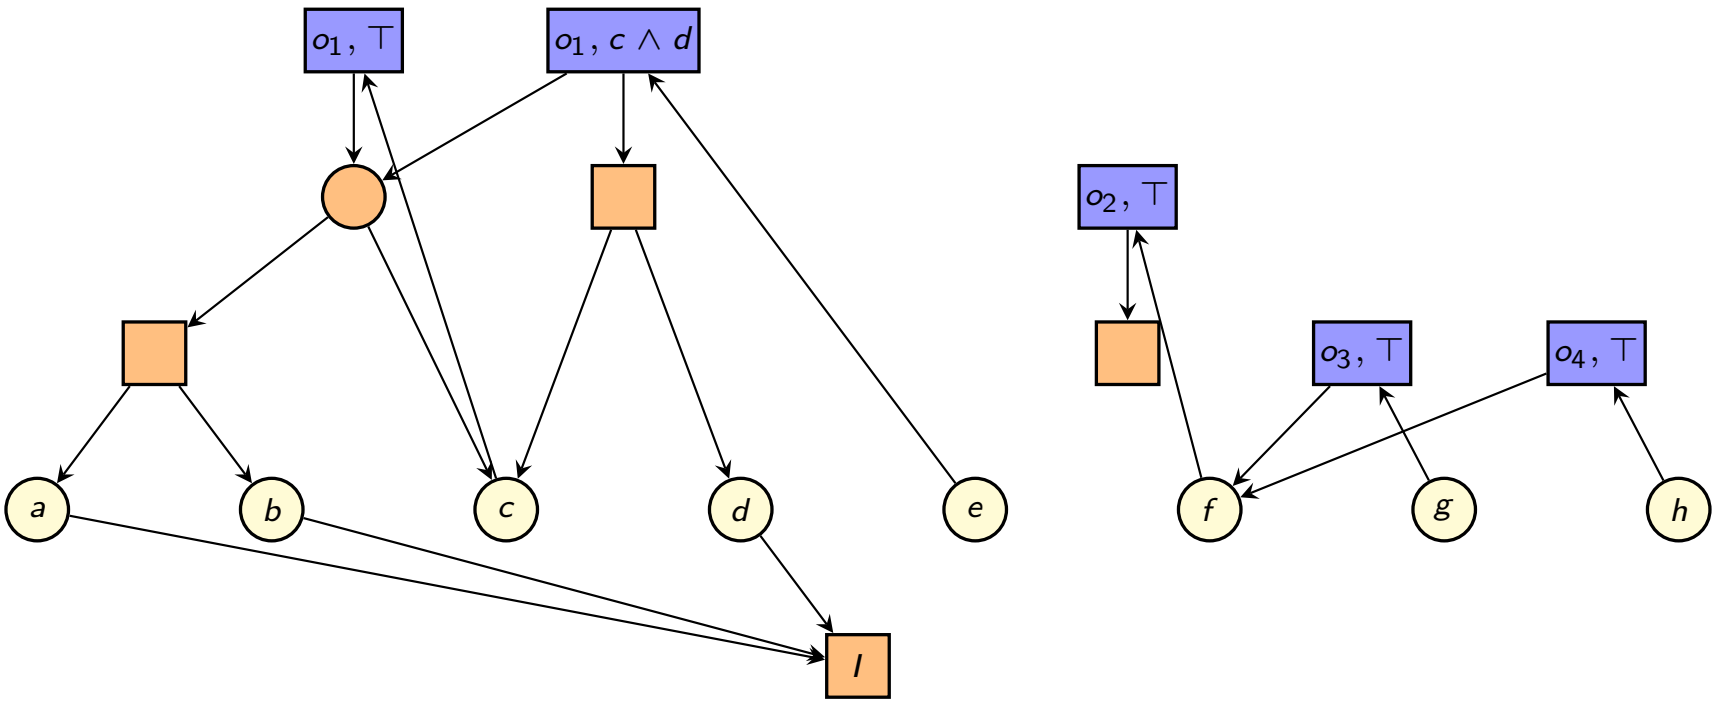


Goal Subgraph

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

$RTG(\Pi^+)$ contains a goal subgraph, consisting of formula nodes for the goal γ and its subformulas, constructed in the same way as formula nodes for preconditions and effect conditions.

Goal Subgraph and Final Relaxed Task Graph: Example

$$\gamma = e \wedge (g \wedge h)$$

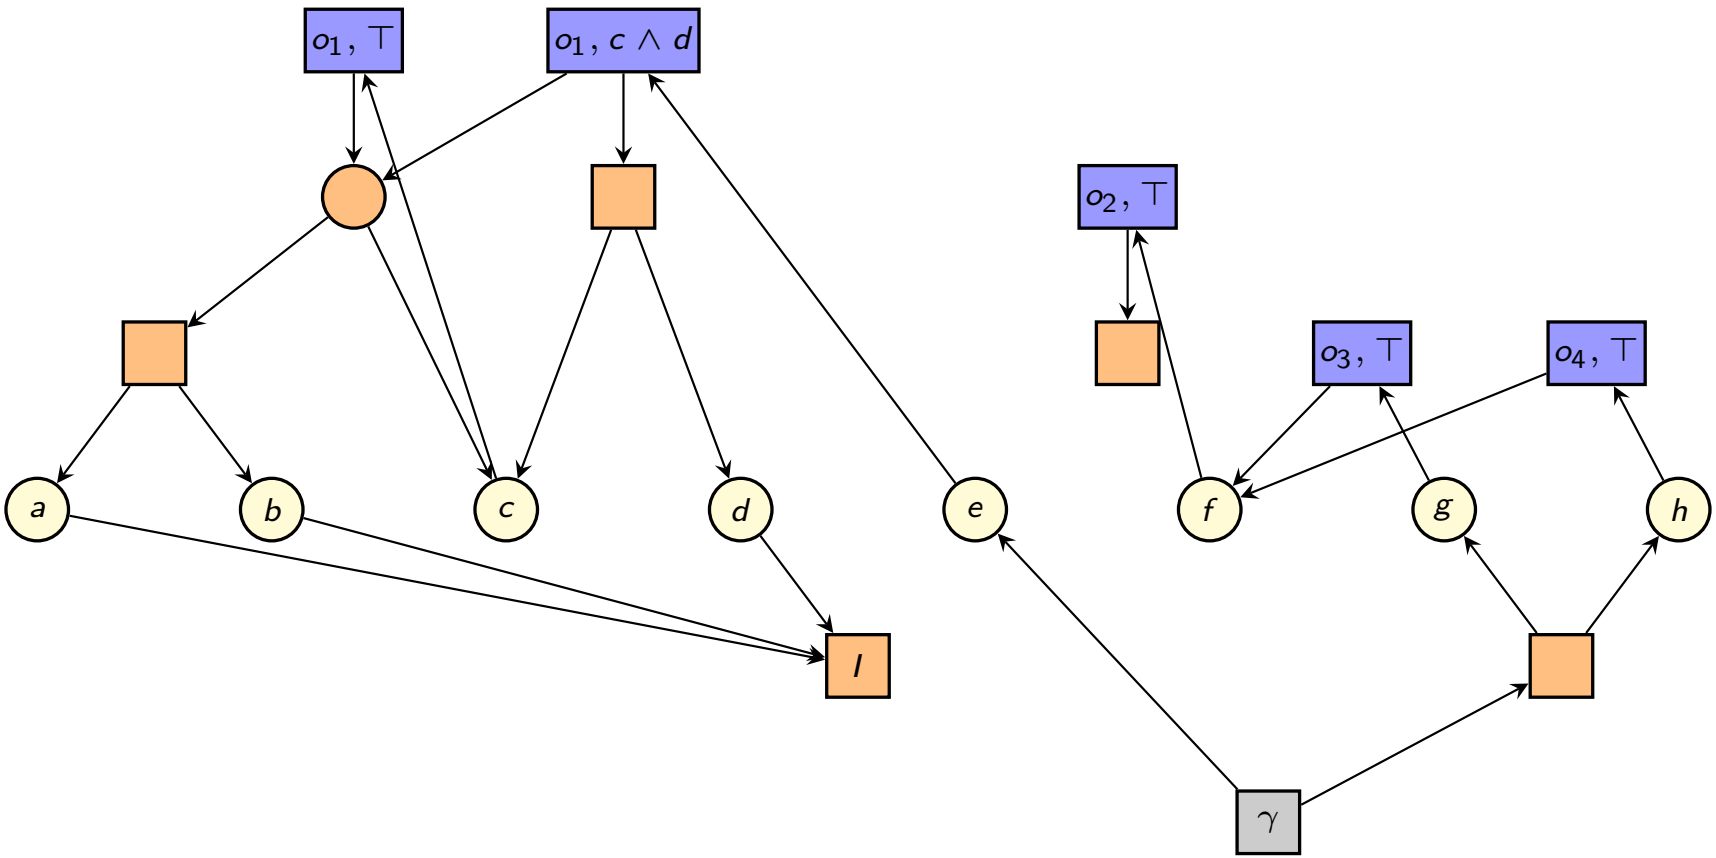

D5.3 Reachability Analysis

How Can We Use Relaxed Task Graphs?

- We are now done with the definition of relaxed task graphs.
- Now we want to use them to derive information about planning tasks.
- In the following chapter, we will use them to compute heuristics for delete-relaxed planning tasks.
- Here, we start with something simpler: reachability analysis.

Forced True Nodes and Reachability

Theorem (Forced True Nodes vs. Reachability)

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task, and let $N_\mathbf{T}$ be the forced true nodes of $RTG(\Pi^+)$.

For all formulas over state variables φ that occur in the definition of Π^+:

φ is true in some reachable state of Π^+ iff $n_\varphi \in N_\mathbf{T}$.

(We omit the proof.)


Forced True Nodes and Reachability: Consequences

Corollary


Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task, and let $N_{\mathbf{T}}$ be the forced true nodes of $RTG(\Pi^+)$. Then:

- *A state variable $v \in V$ is true in at least one reachable state iff $n_v \in N_{\mathbf{T}}$.*
- *An operator $o^+ \in O^+$ is part of at least one applicable operator sequence iff $n_{pre(o^+)} \in N_{\mathbf{T}}$.*
- *The relaxed task is solvable iff $n_\gamma \in N_{\mathbf{T}}$.*

Reachability Analysis: Example

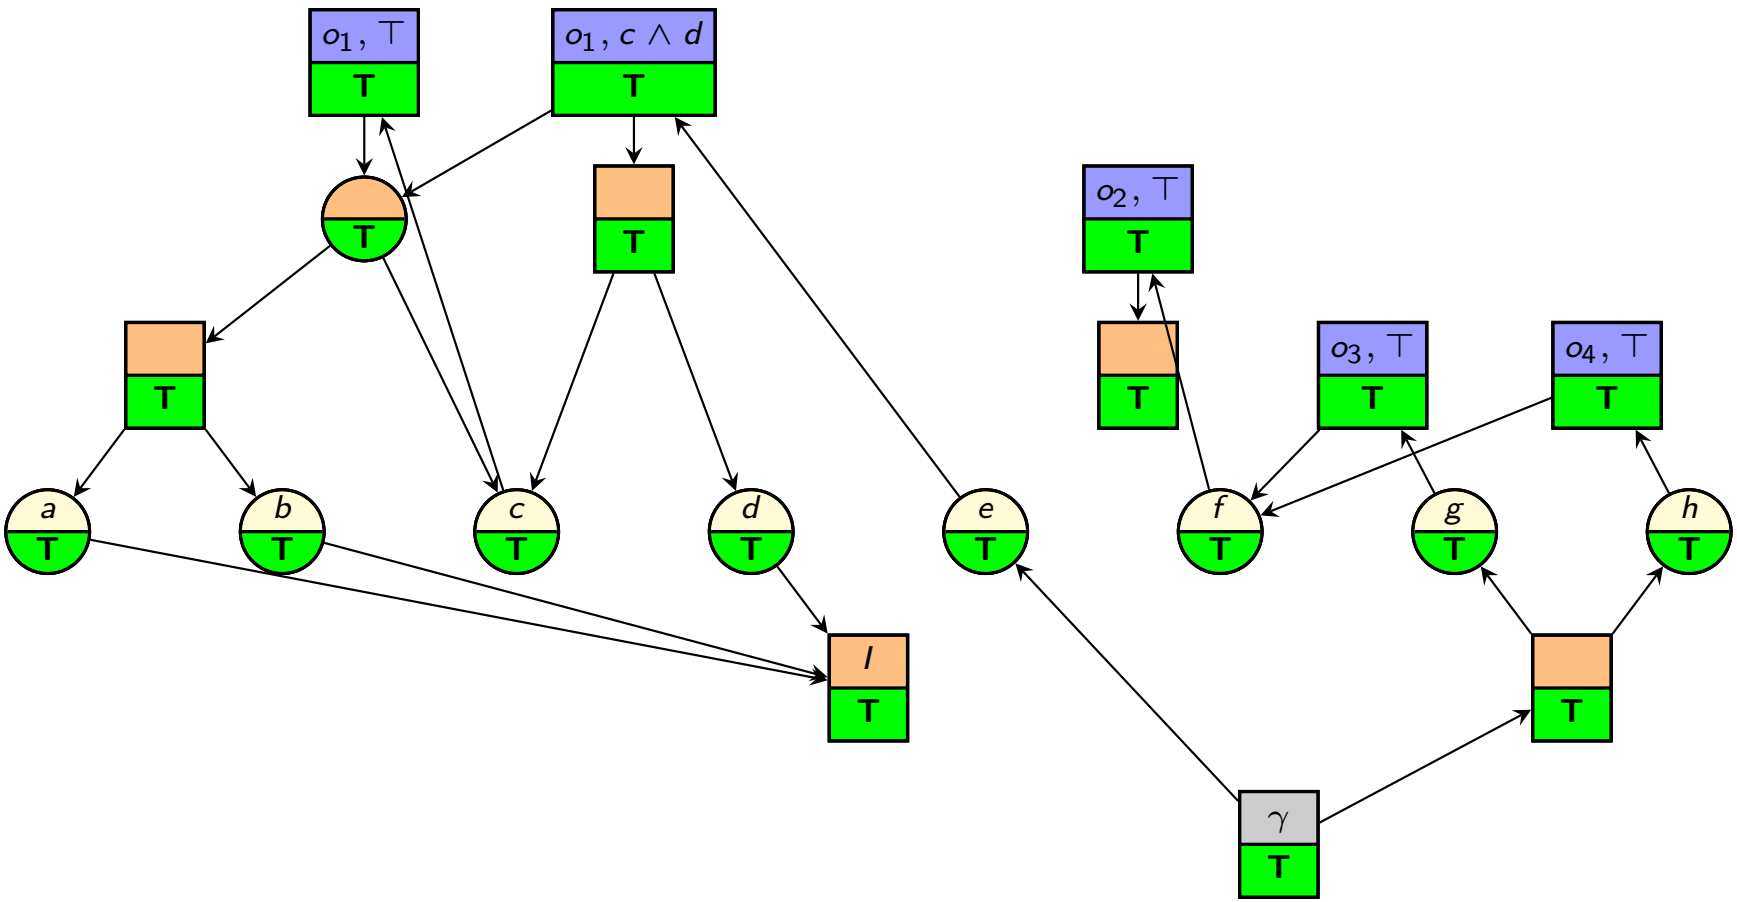

Reachability Analysis: Example with Different Initial State

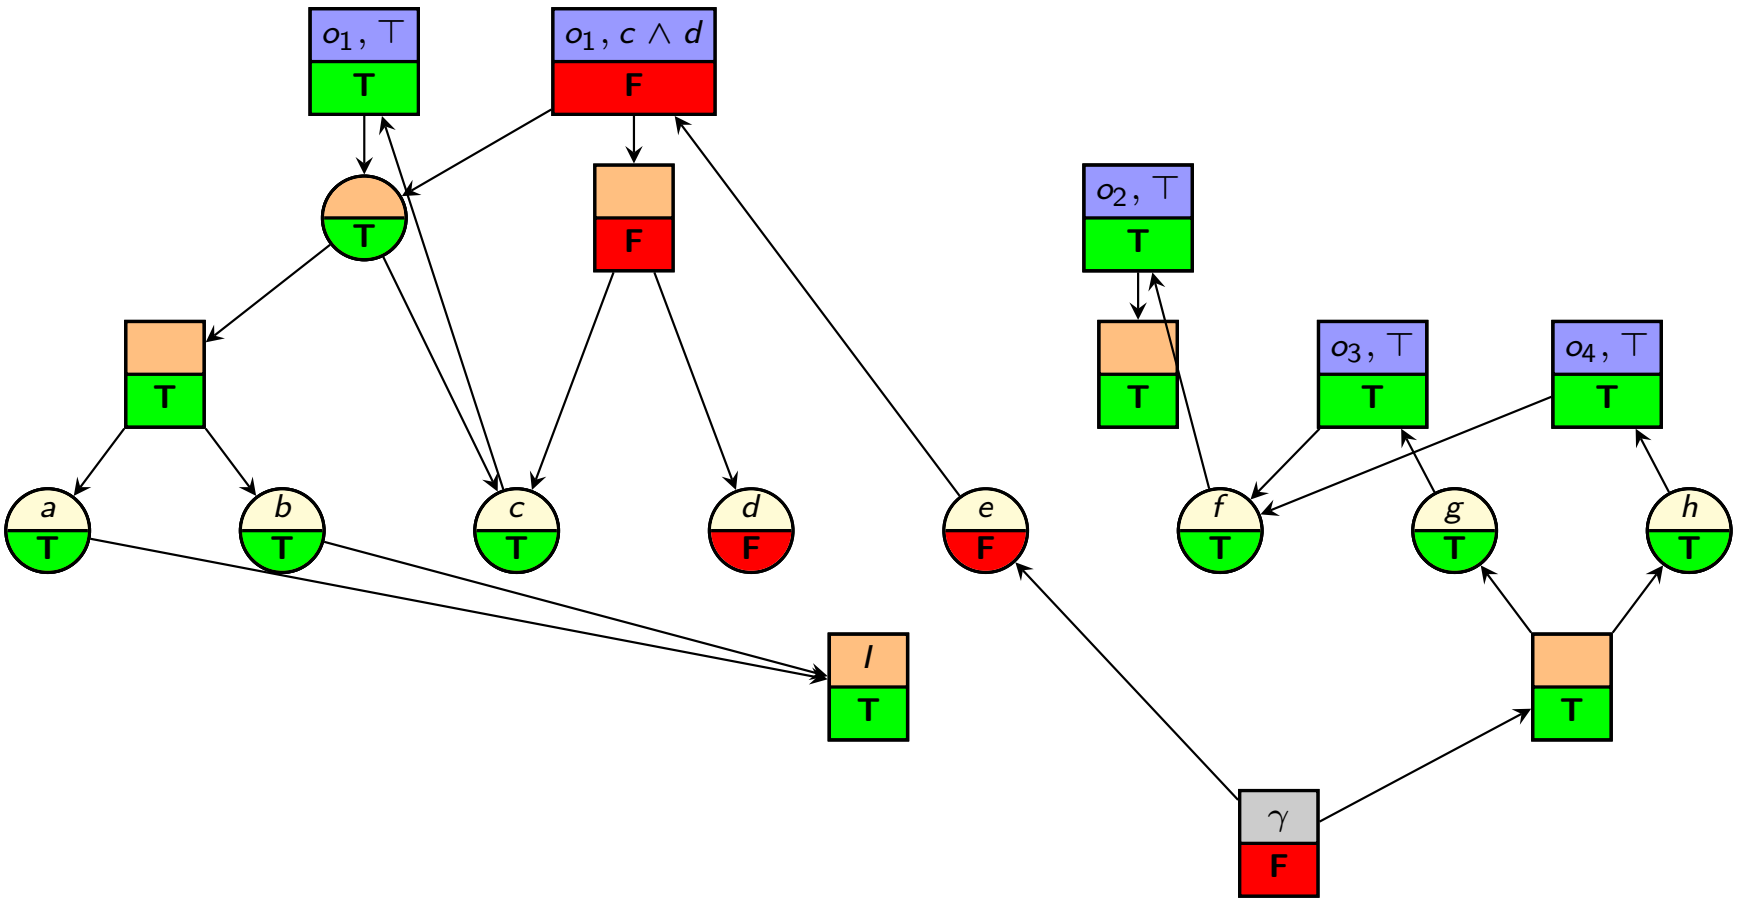

D5.4 Remarks

Relaxed Task Graphs in the Literature

Some remarks on the planning literature:

- Usually, only the STRIPS case is studied.

  $\rightsquigarrow$ definitions simpler: only variable nodes and operator nodes, no formula nodes or effect nodes
- Usually, so-called relaxed planning graphs (RPGs) are studied instead of RTGs.
- These are temporally unrolled versions of RTGs, i.e., they have multiple layers ("time steps") and are acyclic.

$\rightsquigarrow$ Foundations of Artificial Intelligence course FS 2026, Ch. F3–F4

D5.5 Summary

Summary

- Relaxed task graphs (RTGs) represent (most of) the information of a relaxed planning task as an AND/OR graph.
- They consist of:
  - variable nodes
  - an initial node
  - operator subgraphs including formula nodes and effect nodes
  - a goal subgraph including formula nodes
- RTGs can be used to analyze reachability in relaxed tasks:
  forced true nodes mean "reachable",
  other nodes mean "unreachable".