Planning and Optimization

D5. Delete Relaxation: Relaxed Task Graphs

Malte Helmert and Gabriele Röger

Universität Basel

October 26, 2026

D5.1 Relaxed Task Graphs


D5.2 Construction

D5.3 Reachability Analysis

D5.4 Remarks

D5.5 Summary

Content of the Course

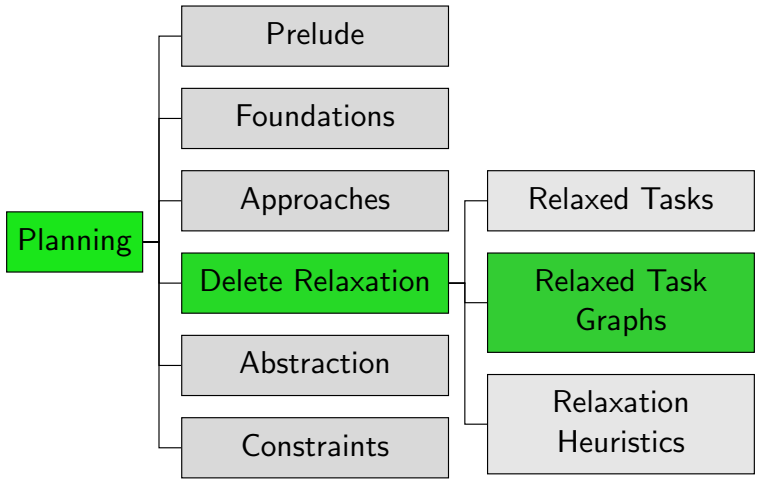

D5.1 Relaxed Task Graphs

Relaxed Task Graphs

Let Π^+ be a relaxed planning task.

The relaxed task graph of Π^+, in symbols $RTG(\Pi^+)$, is an AND/OR graph that encodes

- which state variables can become true in an applicable operator sequence for Π^+,
- which operators of Π^+ can be included in an applicable operator sequence for Π^+,
- if the goal of Π^+ can be reached,
- and how these things can be achieved.

We present its definition in stages.

Note: Throughout this chapter, we assume flat operators.

Running Example

As a running example, consider the relaxed planning task $\langle V, I, \{o_1, o_2, o_3, o_4\}, \gamma \rangle$ with

$$
\begin{aligned}
V &= \{a, b, c, d, e, f, g, h\} \\
I &= \{a \mapsto \mathbf{T}, b \mapsto \mathbf{T}, c \mapsto \mathbf{F}, d \mapsto \mathbf{T}, \\
&\qquad e \mapsto \mathbf{F}, f \mapsto \mathbf{F}, g \mapsto \mathbf{F}, h \mapsto \mathbf{F}\} \\
o_1 &= \langle c \vee (a \wedge b), c \wedge ((c \wedge d) \rhd e), 1 \rangle \\
o_2 &= \langle \top, f, 2 \rangle \\
o_3 &= \langle f, g, 1 \rangle \\
o_4 &= \langle f, h, 1 \rangle \\
\gamma &= e \wedge (g \wedge h)
\end{aligned}
$$

D5.2 Construction

Components of Relaxed Task Graphs

A relaxed task graph has four kinds of components:

- Variable nodes represent the state variables.
- The initial node represent the initial state.
- Operator subgraphs represent the preconditions and effects of operators.
- The goal subgraph represents the goal.

The idea is to construct the graph in such a way that all nodes representing reachable aspects of the task are forced true.

Variable Nodes

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

- For each $v \in V$, $RTG(\Pi^+)$ contains an OR node n_v.
  These nodes are called variable nodes.

Variable Nodes: Example

$$V = \{a, b, c, d, e, f, g, h\}$$




Initial Node

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

- $RTG(\Pi^+)$ contains an AND node n_I.
  This node is called the initial node.
- For all $v \in V$ with $I(v) = \mathbf{T}$, $RTG(\Pi^+)$ has an arc from n_v to n_I. These arcs are called initial state arcs.
- The initial node has no successor nodes.

Initial Node and Initial State Arcs: Example

$$I = \{a \mapsto \mathbf{T}, b \mapsto \mathbf{T}, c \mapsto \mathbf{F}, d \mapsto \mathbf{T}, e \mapsto \mathbf{F}, f \mapsto \mathbf{F}, g \mapsto \mathbf{F}, h \mapsto \mathbf{F}\}$$



Operator Subgraphs

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

For each operator $o^+ \in O^+$, $RTG(\Pi^+)$ contains an operator subgraph with the following parts:

- for each formula φ that occurs as a subformula of the precondition or of some effect condition of o^+, a formula node n_φ (details follow)
- for each conditional effect $(\chi \rhd v)$ that occurs in the effect of o^+, an effect node $n^\chi_{o^+}$ (details follow); unconditional effects are treated as $(\top \rhd v)$

Formula Nodes

Formula nodes n_φ are defined as follows:

- If $\varphi = v$ for some state variable v, n_φ is the variable node n_v (so no new node is introduced).
- If $\varphi = \top$, n_φ is an AND node without outgoing arcs.
- If $\varphi = \bot$, n_φ is an OR node without outgoing arcs.
- If $\varphi = (\varphi_1 \wedge \varphi_2)$, n_φ is an AND node with outgoing arcs to n_{φ_1} and n_{φ_2}.
- If $\varphi = (\varphi_1 \vee \varphi_2)$, n_φ is an OR node with outgoing arcs to n_{φ_1} and n_{φ_2}.

Note: identically named nodes are identical, so if the same formula occurs multiple times in the task, the same node is reused.

Effect Nodes


Effect nodes $n^\chi_{o^+}$ are defined as follows:

- $n^\chi_{o^+}$ is an AND node
- It has an outgoing arc to the formula nodes $n_{pre(o^+)}$ (precondition arcs) and n_χ (effect condition arcs).
- Exception: if $\chi = \top$, there is no effect condition arc. (This makes our pictures cleaner.)
- For every conditional effect $(\chi \rhd v)$ in the operator, there is an arc from variable node n_v to $n^\chi_{o^+}$ (effect arcs).

Note: identically named nodes are identical, so if the same effect condition occurs multiple times in the same operator, this only induces one node.


Operator Subgraphs: Example

$o_1 = \langle c \vee (a \wedge b), c \wedge ((c \wedge d) \rhd e), 1 \rangle$

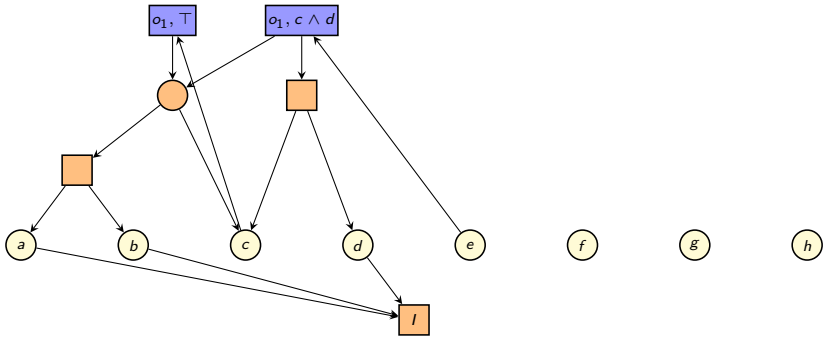


Operator Subgraphs: Example

$o_2 = \langle \top, f, 2 \rangle$

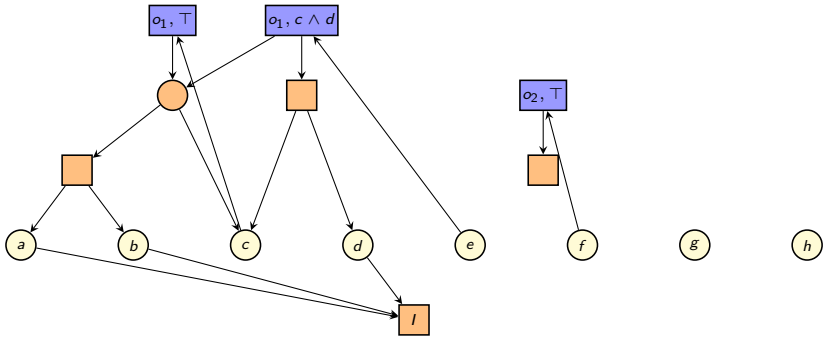


Operator Subgraphs: Example

$o_3 = \langle f, g, 1 \rangle$

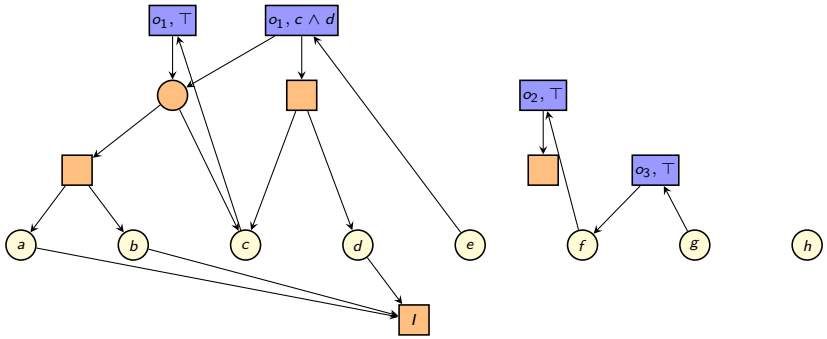

Operator Subgraphs: Example

$o_4 = \langle f, h, 1 \rangle$

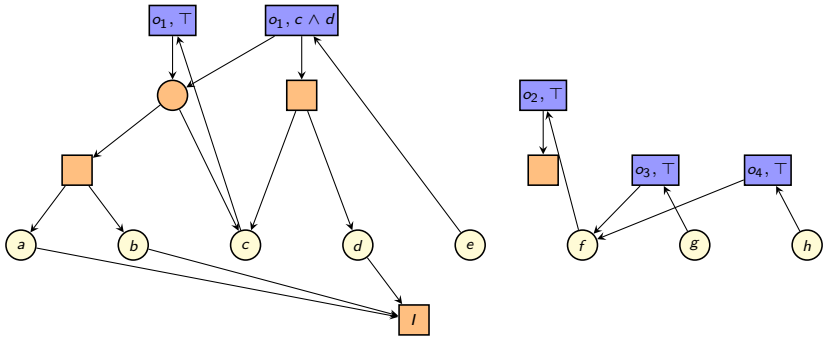


Goal Subgraph

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task.

$RTG(\Pi^+)$ contains a goal subgraph, consisting of formula nodes for the goal γ and its subformulas, constructed in the same way as formula nodes for preconditions and effect conditions.

Goal Subgraph and Final Relaxed Task Graph: Example

$\gamma = e \wedge (g \wedge h)$

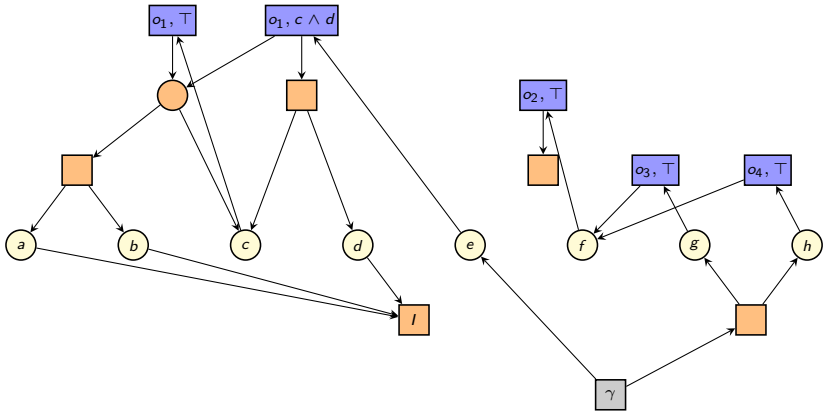

D5.3 Reachability Analysis

How Can We Use Relaxed Task Graphs?

- We are now done with the definition of relaxed task graphs.
- Now we want to use them to derive information about planning tasks.
- In the following chapter, we will use them to compute heuristics for delete-relaxed planning tasks.
- Here, we start with something simpler: reachability analysis.

Forced True Nodes and Reachability

Theorem (Forced True Nodes vs. Reachability)

Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task, and let $N_{\mathbf{T}}$ be the forced true nodes of $RTG(\Pi^+)$.

For all formulas over state variables φ that occur in the definition of Π^+:

φ is true in some reachable state of Π^+ iff $n_\varphi \in N_{\mathbf{T}}$.

(We omit the proof.)


Forced True Nodes and Reachability: Consequences

Corollary


Let $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ be a relaxed planning task, and let $N_\mathbf{T}$ be the forced true nodes of $RTG(\Pi^+)$. Then:

- *A state variable $v \in V$ is true in at least one reachable state iff $n_v \in N_\mathbf{T}$.*
- *An operator $o^+ \in O^+$ is part of at least one applicable operator sequence iff $n_{pre(o^+)} \in N_\mathbf{T}$.*
- *The relaxed task is solvable iff $n_\gamma \in N_\mathbf{T}$.*

Reachability Analysis: Example

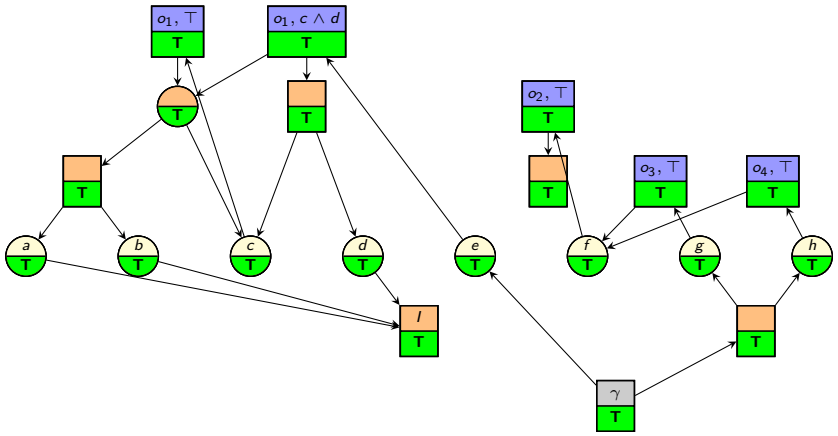

Reachability Analysis: Example with Different Initial State

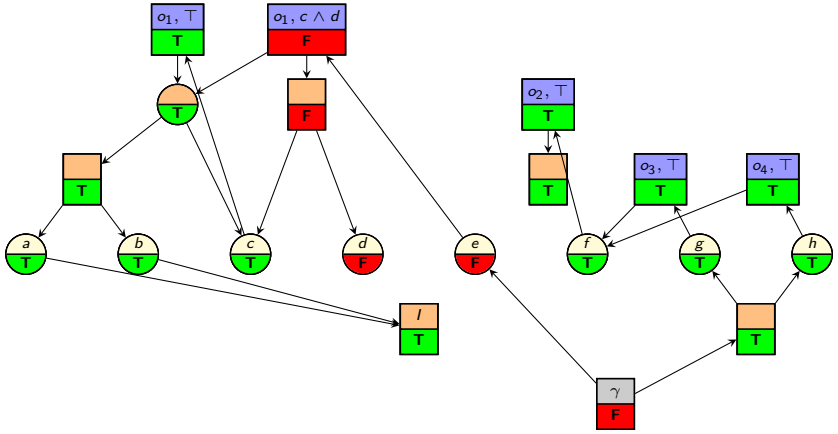

D5.4 Remarks

Relaxed Task Graphs in the Literature

Some remarks on the planning literature:

- Usually, only the STRIPS case is studied.
- ⇝ definitions simpler: only variable nodes and operator nodes, no formula nodes or effect nodes
- Usually, so-called relaxed planning graphs (RPGs) are studied instead of RTGs.
- These are temporally unrolled versions of RTGs, i.e., they have multiple layers ("time steps") and are acyclic.

⇝ Foundations of Artificial Intelligence course FS 2026, Ch. F3–F4

D5.5 Summary

Summary

- Relaxed task graphs (RTGs) represent (most of) the information of a relaxed planning task as an AND/OR graph.
- They consist of:
  - variable nodes
  - an initial node
  - operator subgraphs including formula nodes and effect nodes
  - a goal subgraph including formula nodes
- RTGs can be used to analyze reachability in relaxed tasks: forced true nodes mean "reachable", other nodes mean "unreachable".