

# Foundations of Artificial Intelligence

## 16. State-Space Search: Greedy BFS, A\*, Weighted A\*

Malte Helmert

University of Basel

March 29, 2021

# State-Space Search: Overview

## Chapter overview: state-space search

- 5.–7. Foundations
- 8.–12. Basic Algorithms
- 13.–19. Heuristic Algorithms
  - 13. Heuristics
  - 14. Analysis of Heuristics
  - 15. Best-first Graph Search
  - 16. Greedy Best-first Search, A\*, Weighted A\*
  - 17. IDA\*
  - 18. Properties of A\*, Part I
  - 19. Properties of A\*, Part II

# Introduction

# What Is It About?

In this chapter we study last chapter's algorithms in more detail:

- greedy best-first search
- A\*
- weighted A\*

# Greedy Best-first Search


# Greedy Best-first Search

## Greedy Best-first Search

only consider the heuristic:  $f(n) = h(n.state)$

Note: usually **without reopening** (for reasons of efficiency)

## Example: Greedy Best-first Search for Route Planning

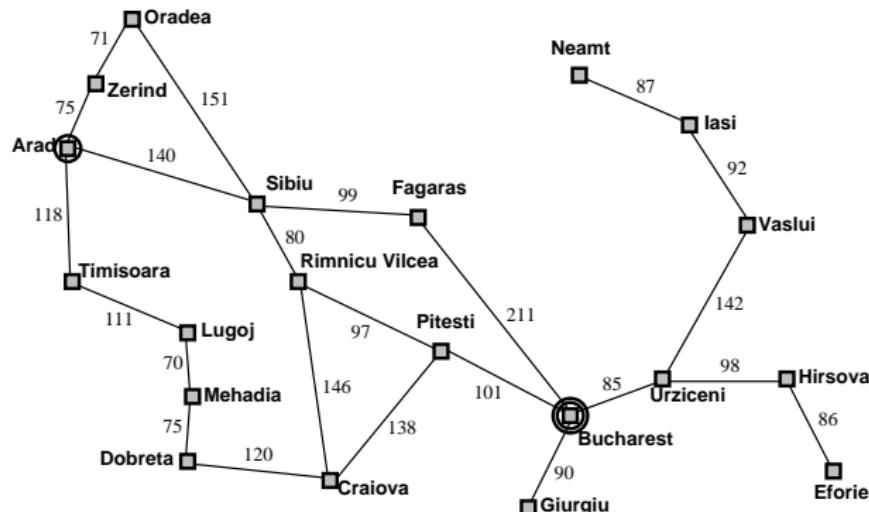

|                |     |
|----------------|-----|
| Arad           | 366 |
| Bucharest      | 0   |
| Craiova        | 160 |
| Drobeta        | 242 |
| Eforie         | 161 |
| Fagaras        | 176 |
| Giurgiu        | 77  |
| Hirsova        | 151 |
| Iasi           | 226 |
| Lugoj          | 244 |
| Mehadia        | 241 |
| Neamt          | 234 |
| Oradea         | 380 |
| Pitesti        | 100 |
| Rimnicu Vilcea | 193 |
| Sibiu          | 253 |
| Timisoara      | 329 |
| Urziceni       | 80  |
| Vaslui         | 199 |
| Zerind         | 374 |

# Example: Greedy Best-first Search for Route Planning

(a) The initial state




# Example: Greedy Best-first Search for Route Planning

(a) The initial state



(b) After expanding Arad

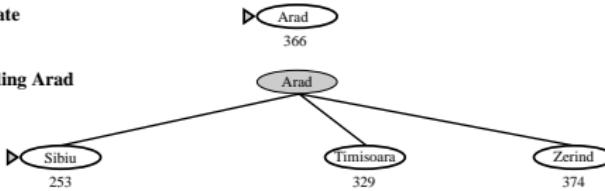


# Example: Greedy Best-first Search for Route Planning


(a) The initial state



(b) After expanding Arad

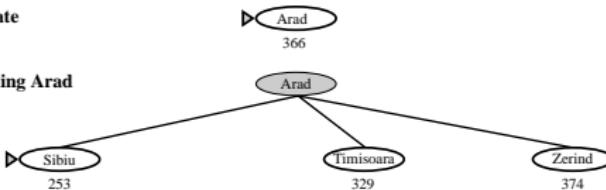

(c) After expanding Sibiu

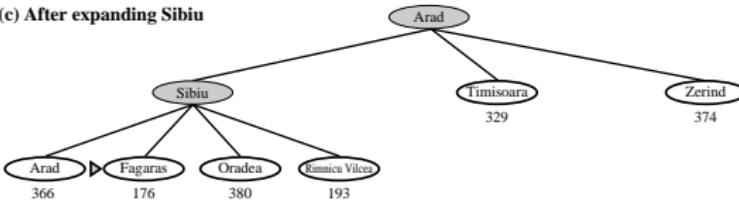


# Example: Greedy Best-first Search for Route Planning


(a) The initial state




(b) After expanding Arad

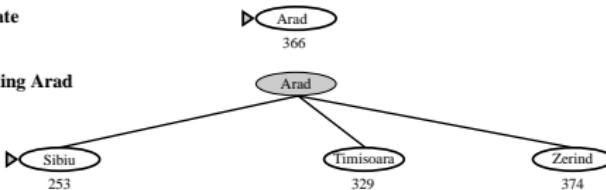

(c) After expanding Sibiu

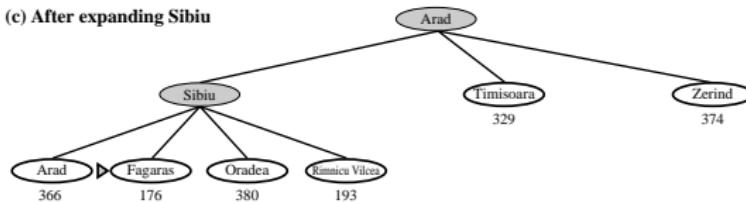

(d) After expanding Fagaras

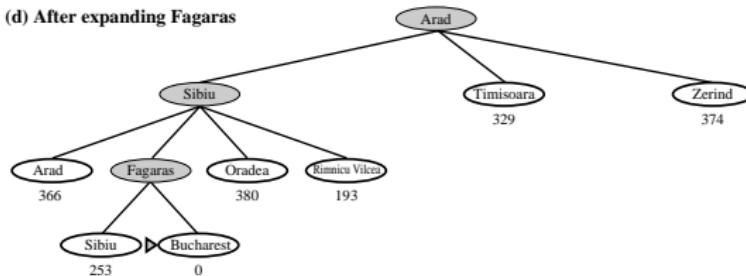

# Greedy Best-first Search: Properties

- complete with **safe** heuristics  
(like all variants of best-first graph search)
- **suboptimal**: solutions can be **arbitrarily bad**
- often **very fast**: one of the fastest search algorithms in practice
- monotonic transformations of  $h$  (e.g. scaling, additive constants) do not affect behaviour ([Why is this interesting?](#))

Introduction  
oo

Greedy Best-first Search  
ooooo

A\*  
●oooooo

Weighted A\*  
ooo

Summary  
oo

A\*

## A\*

## A\*

combine greedy best-first search with uniform cost search:

$$f(n) = g(n) + h(n.\text{state})$$

- trade-off between path cost and proximity to goal
- $f(n)$  estimates overall cost of cheapest solution from initial state via  $n$  to the goal

## A\*: Citations

About 8,370 results (0.10 sec)

Did you mean: **harry** nilsson raphael

### A formal basis for the heuristic determination of minimum cost paths

[PE Hart, NJ Nilsson, B Raphael - IEEE transactions on Systems ...](#), 1968 - ieeexplore.ieee.org

Although the problem of determining the minimum cost path through a graph arises naturally in a number of interesting applications, there has been no underlying theory to guide the development of efficient search procedures. Moreover, there is no adequate conceptual ...

Cited by 8204 Related articles All 5 versions

### Correction to a formal basis for the heuristic determination of minimum cost paths

[PE Hart, NJ Nilsson, B Raphael - ACM SIGART Bulletin, 1972](#) - dl.acm.org

Our paper on the use of heuristic information in graph searching defined a path-finding algorithm, A\*, and proved that it had two important properties. In the notation of the paper, we proved that if the heuristic function  $f(n)$  is a lower bound on the true minimal cost from ...

Cited by 438 Related articles All 9 versions

### Research and applications: Artificial intelligence

[B Raphael, RE Fikes, LJ Chaitin, PE Hart, RO Duda... - 1971](#) - ntrs.nasa.gov

A program of research in the field of artificial intelligence is presented. The research areas discussed include automatic theorem proving, representations of real-world environments, problem-solving methods, the design of a programming system for problem-solving ...

Cited by 16 Related articles All 3 versions

## A\*: Citations

About 8,370 results (0.10 sec)

Did you mean: **harry** nilsson raphael

### A formal basis for the heuristic determination of minimum cost paths

[PE Hart, NJ Nilsson, B Raphael - IEEE transactions on Systems ...](#), 1968 - ieeexplore.ieee.org

Although the problem of determining the minimum cost path through a graph arises naturally in a number of interesting applications, there has been no underlying theory to guide the development of efficient search procedures. Moreover, there is no adequate conceptual ...

☆ 99 Cited by 8204 Related articles All 5 versions ☰

### Correction to a formal basis for the heuristic determination of minimum cost paths

[PE Hart, NJ Nilsson, B Raphael - ACM SIGART Bulletin, 1972](#) - dl.acm.org

Our paper on the use of heuristic information in graph searching defined a path-finding algorithm, A\*, and proved that it had two important properties. In the notation of the paper, we proved that if the heuristic function  $f(n)$  is a lower bound on the true minimal cost from ...

☆ 99 Cited by 438 Related articles All 9 versions ☰


### Research and applications: Artificial intelligence

[B Raphael, RE Fikes, LJ Chaitin, PE Hart, RO Duda... - 1971](#) - ntrs.nasa.gov

A program of research in the field of artificial intelligence is presented. The research areas discussed include automatic theorem proving, representations of real-world environments, problem-solving methods, the design of a programming system for problem-solving ...


☆ 99 Cited by 16 Related articles All 3 versions ☰

## Example: A\* for Route Planning

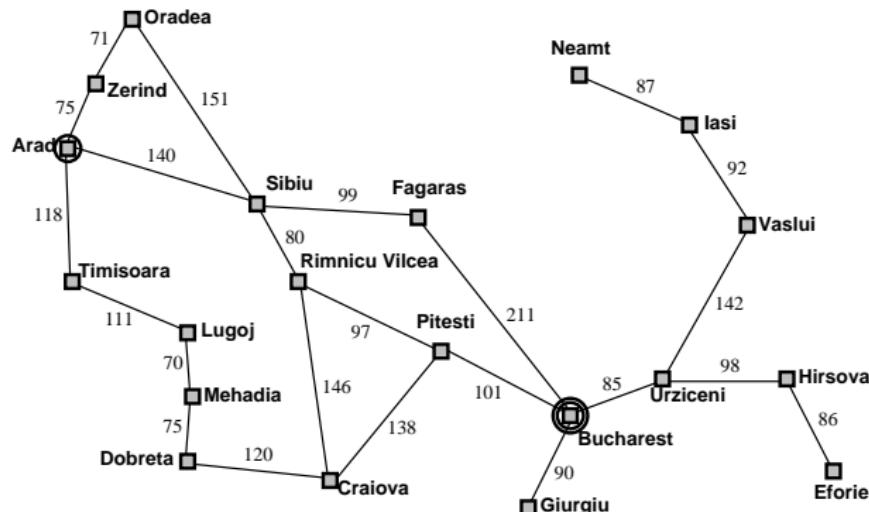


# Example: A\* for Route Planning

**(a) The initial state**




# Example: A\* for Route Planning

(a) The initial state




(b) After expanding Arad

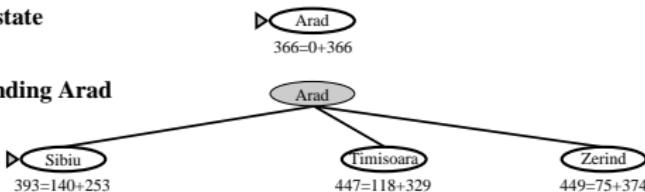


# Example: A\* for Route Planning


(a) The initial state



(b) After expanding Arad

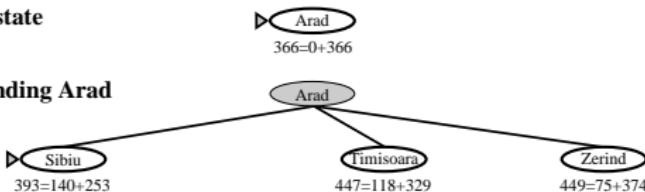


(c) After expanding Sibiu

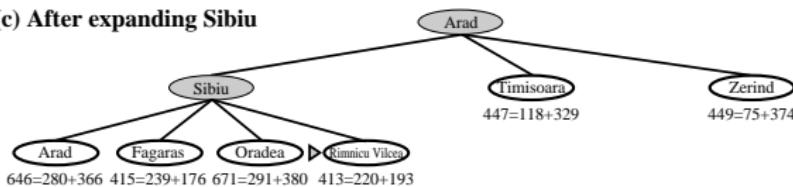


# Example: A\* for Route Planning


(a) The initial state




(b) After expanding Arad

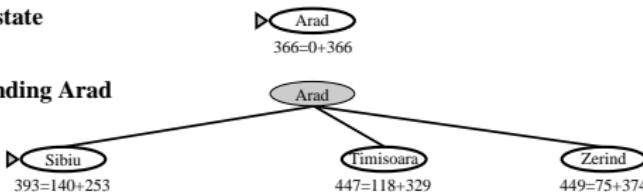

(c) After expanding Sibiu

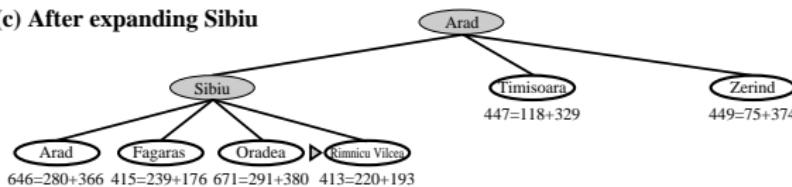


(d) After expanding Rimnicu Vilcea

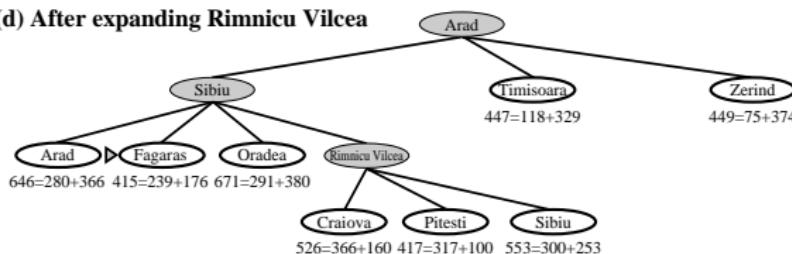


## Example: A\* for Route Planning

(e) After expanding Fagaras

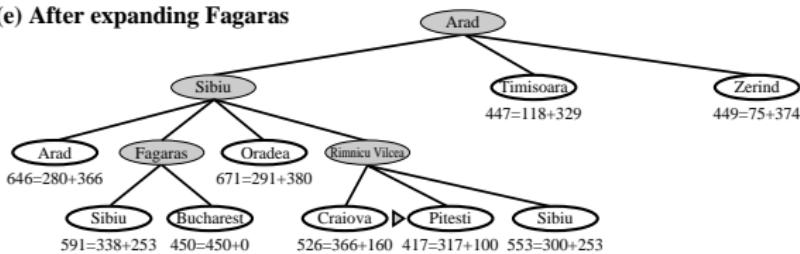


## Example: A\* for Route Planning

(e) After expanding Fagaras

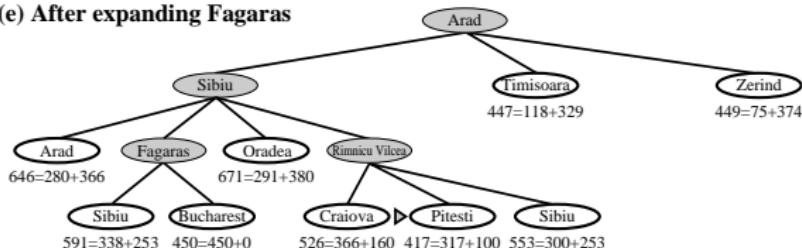

(f) After expanding Pitesti

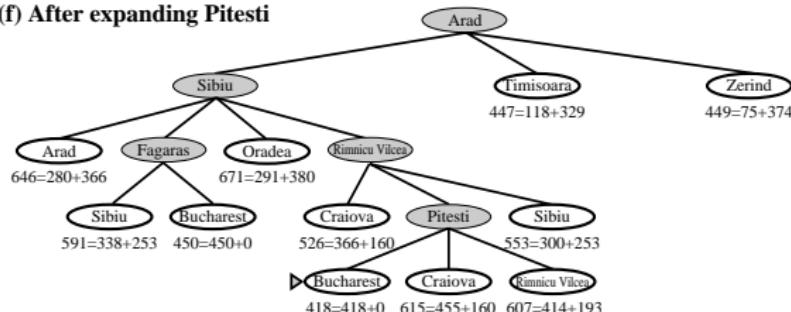

# A\*: Properties

- complete with **safe** heuristics  
(like all variants of best-first graph search)
- with reopening: optimal with **admissible** heuristics
- without reopening: optimal with heuristics  
that are **admissible** and **consistent**

~~ proofs: Chapters 18 and 19

# A\*: Implementation Aspects

some practical remarks on implementing A\*:

- common bug: reopening not implemented although heuristic is not consistent
- common bug: duplicate test “too early” (upon generation of search nodes)
- common bug: goal test “too early” (upon generation of search nodes)
- all these bugs lead to loss of optimality and can remain undetected for a long time

# Weighted A\*

# Weighted A\*

## Weighted A\*

A\* with more heavily weighted heuristic:

$$f(n) = g(n) + w \cdot h(n.state),$$

where **weight**  $w \in \mathbb{R}_0^+$  with  $w \geq 1$  is a freely choosable parameter

**Note:**  $w < 1$  is conceivable, but usually not a good idea  
([Why not?](#))

# Weighted A\*: Properties

weight parameter controls “greediness” of search:

- $w = 0$ : like uniform cost search
- $w = 1$ : like A\*
- $w \rightarrow \infty$ : like greedy best-first search

with  $w \geq 1$  properties analogous to A\*:

- *h* admissible:  
found solution guaranteed to be at most  $w$  times as expensive as optimum when reopening is used
- *h* admissible and consistent:  
found solution guaranteed to be at most  $w$  times as expensive as optimum; no reopening needed

(without proof)

Introduction  
oo

Greedy Best-first Search  
ooooo

A\*  
oooooooo

Weighted A\*  
ooo

Summary  
●○

# Summary

# Summary

best-first graph search with evaluation function  $f$ :

- $f = h$ : **greedy best-first search**  
suboptimal, often very fast
- $f = g + h$ : **A\***  
optimal if  $h$  admissible and consistent  
or if  $h$  admissible and **reopening** is used
- $f = g + w \cdot h$ : **weighted A\***  
for  $w \geq 1$  suboptimality factor at most  $w$   
under same conditions as for optimality of A\*