Theory of Computer Science

E2. P, NP and Polynomial Reductions

Malte Helmert

University of Basel

May 23, 2016

Overview: Course

contents of this course:

- logic ✓
  - ▷ How can knowledge be represented?
    How can reasoning be automated?
- automata theory and formal languages ✓
  - ▷ What is a computation?
- computability theory ✓
  - ▷ What can be computed at all?
- complexity theory
  - ▷ What can be computed efficiently?

Overview: Complexity Theory

Complexity Theory

E1. Motivation and Introduction

E2. P, NP and Polynomial Reductions

E3. Cook-Levin Theorem

E4. Some NP-Complete Problems, Part I

E5. Some NP-Complete Problems, Part II

Further Reading (German)

Literature for this Chapter (German)

Theoretische Informatik – kurz gefasst
by Uwe Schöning (5th edition)

- Chapters 3.1 and 3.2

Further Reading (English)

Literature for this Chapter (English)

Introduction to the Theory of Computation
by Michael Sipser (3rd edition)

- Chapter 7.1–7.4

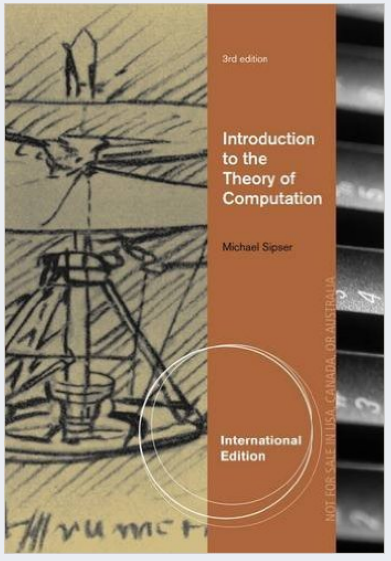

P and NP

Accepting a Word in Time n

Definition (Accepting a Word in Time n)

Let M be a DTM or NTM with input alphabet Σ, $w \in \Sigma^*$ a word and $n \in \mathbb{N}_0$.

M accepts w in time n if there is a sequence of configurations $c_0, \ldots, c_k$ with $k \leq n$, where:

- c_0 is the start configuration for w,
- $c_0 \vdash c_1 \vdash \cdots \vdash c_k$, and
- c_k is an end configuration.

German: M akzeptiert w in Zeit n

Accepting a Language in Time f

Definition (Accepting a Language in Time f)

Let M be a DTM or NTM with input alphabet Σ,
$L \subseteq \Sigma^*$ a language and $f : \mathbb{N}_0 \to \mathbb{N}_0$ a function.

M accepts L in time f if:

1. for all words $w \in L$: M accepts w in time $f(|w|)$
2. for all words $w \notin L$: M does not accept w

German: M akzeptiert L in Zeit f

P and NP

Definition (P and NP)

P is the set of all languages L for which a DTM M and a polynomial p exist such that M accepts L in time p.

NP is the set of all languages L for which an NTM M and a polynomial p exist such that M accepts L in time p.

P and NP: Remarks

- Sets of languages like P and NP that are defined in terms of computation time of TMs (or other computation models) are called complexity classes.
- We know that $P \subseteq NP$. (Why?)
- Whether the converse is also true is an open question: this is the famous P-NP problem.

German: Komplexitätsklassen, P-NP-Problem

Example: DirHamiltonCycle ∈ NP

Example (DirHamiltonCycle ∈ NP)

The nondeterministic algorithm of Chapter E1 solves the problem and can be implemented on an NTM in polynomial time.

- Is DirHamiltonCycle ∈ P also true?
- The answer is unknown.
- So far, only exponential deterministic algorithms for the problem are known.

Simulation of NTMs with DTMs

- Unlike DTMs, NTMs are not a realistic computation model: they cannot be directly implemented on computers.
- But NTMs can be simulated by systematically trying all computation paths, e. g., with a breadth-first search.

Simulation of NTMs with DTMs

- Unlike DTMs, NTMs are not a realistic computation model: they cannot be directly implemented on computers.
- But NTMs can be simulated by systematically trying all computation paths, e. g., with a breadth-first search.

More specifically:

- Let M be an NTM that accepts language L in time f, where $f(n) \geq n$ for all $n \in \mathbb{N}_0$.
- Then we can specify a DTM M' that accepts L in time f', where $f'(n) = 2^{O(f(n))}$.
- without proof (cf. Sipser, Theorem 7.11)

Questions

Questions?

Polynomial Reductions

Polynomial Reductions: Idea

- Reductions are a common and powerful concept in computer science. We know them from Part D.
- The basic idea is that we solve a new problem by reducing it to a known problem.

Polynomial Reductions: Idea

- Reductions are a common and powerful concept in computer science. We know them from Part D.
- The basic idea is that we solve a new problem by reducing it to a known problem.
- In complexity theory we want to use reductions that allow us to prove statements of the following kind:

  Problem A can be solved efficiently
  if problem B can be solved efficiently.

- For this, we need a reduction from A to B that can be computed efficiently itself (otherwise it would be useless for efficiently solving A).

Polynomial Reductions

Definition (Polynomial Reduction)

Let $A \subseteq \Sigma^*$ and $B \subseteq \Gamma^*$ be decision problems.
We say that A can be polynomially reduced to B,
written $A \leq_p B$, if there is a function $f : \Sigma^* \to \Gamma^*$ such that:

- f can be computed in polynomial time by a DTM
  - i. e., there is a polynomial p and a DTM M such that M computes $f(w)$ in at most $p(|w|)$ steps given input $w \in \Sigma^*$
- f reduces A to B
  - i. e., for all $w \in \Sigma^*$: $w \in A$ iff $f(w) \in B$

f is called a polynomial reduction from A to B

German: A polynomiell auf B reduzierbar,
polynomielle Reduktion von A auf B

Polynomial Reductions: Remarks

- Polynomial reductions are also called Karp reductions (after Richard Karp, who wrote a famous paper describing many such reductions in 1972).
- In practice, of course we do not have to specify a DTM for f: it just has to be clear that f can be computed in polynomial time by a deterministic algorithm.

Polynomial Reductions: Example (1)

Definition (HamiltonCycle)

HamiltonCycle is the following decision problem:

- Given: undirected graph $G = \langle V, E \rangle$
- Question: Does G contain a Hamilton cycle?

Polynomial Reductions: Example (2)

Definition (TSP)

TSP (traveling salesperson problem) is the following decision problem:

- Given: finite set $S \neq \emptyset$ of cities, symmetric cost function $cost : S \times S \to \mathbb{N}_0$, cost bound $K \in \mathbb{N}_0$
- Question: Is there a tour with total cost at most K, i. e., a permutation $\langle s_1, \ldots, s_n \rangle$ of the cities with $\sum_{i=1}^{n-1} cost(s_i, s_{i+1}) + cost(s_n, s_1) \leq K$?

German: Problem der/des Handlungsreisenden

Polynomial Reductions: Example (3)

Theorem ($\textsc{HamiltonCycle} \leq_p \text{TSP}$)

$\textsc{HamiltonCycle} \leq_p \text{TSP}$.

Proof.

$\rightsquigarrow$ blackboard $\square$

Properties of Polynomial Reductions (1)

Theorem (Properties of Polynomial Reductions)

Let A, B and C decision problems.

1. *If $A \leq_p B$ and $B \in P$, then $A \in P$.*
2. *If $A \leq_p B$ and $B \in NP$, then $A \in NP$.*
3. *If $A \leq_p B$ and $A \notin P$, then $B \notin P$.*
4. *If $A \leq_p B$ and $A \notin NP$, then $B \notin NP$.*
5. *If $A \leq_p B$ and $B \leq_p C$, then $A \leq_p C$.*

Properties of Polynomial Reductions (2)

Proof.

for 1.:

We must show that there is a DTM accepting A in polynomial time.

We know:

- There is a DTM M_B that accepts B in time p, where p is a polynomial.
- There is a DTM M_f that computes a reduction from A to B in time q, where q is a polynomial.

...

Properties of Polynomial Reductions (3)

Proof (continued).

Consider the machine M that first behaves like M_f, and then (after M_f stops) behaves like M_B on the output of M_f.

M accepts A:

- M behaves on input w as M_B does on input $f(w)$, so it accepts w if and only if $f(w) \in B$.
- Because f is a reduction, $w \in A$ iff $f(w) \in B$.

...

Properties of Polynomial Reductions (4)

Proof (continued).

Computation time of M on input w:

- first M_f runs on input w: $\leq q(|w|)$ steps
- then M_B runs on input $f(w)$: $\leq p(|f(w)|)$ steps
- $|f(w)| \leq |w| + q(|w|)$ because in $q(|w|)$ steps, M_f can write at most $q(|w|)$ additional symbols onto the tape

$\rightsquigarrow$ total computation time $\leq q(|w|) + p(|f(w)|)$
$\leq q(|w|) + p(|w| + q(|w|))$

$\rightsquigarrow$ this is polynomial in $|w|$ $\rightsquigarrow$ $A \in \mathrm{P}$.

...

Properties of Polynomial Reductions (5)

Proof (continued).

for 2.:

analogous to 1., only that M_B and M are NTMs

Properties of Polynomial Reductions (5)

Proof (continued).

for 2.:

analogous to 1., only that M_B and M are NTMs

of 3.+4.:

equivalent formulations of 1.+2. (contraposition)

Properties of Polynomial Reductions (5)

Proof (continued).

for 2.:

analogous to 1., only that M_B and M are NTMs

of 3.+4.:

equivalent formulations of 1.+2. (contraposition)

of 5.:

Let $A \leq_p B$ with reduction f and $B \leq_p C$ with reduction g.
Then $g \circ f$ is a reduction of A to C.

The computation time of the two computations in sequence is polynomial by the same argument used in the proof for 1. □

Questions

Questions?

NP-Hardness and NP-Completeness

NP-Hardness and NP-Completeness

Definition (NP-Hard, NP-Complete)

Let B be a decision problem.

B is called NP-hard if $A \leq_p B$ for all problems $A \in \text{NP}$.

B is called NP-complete if $B \in \text{NP}$ and B is NP-hard.

German: NP-hart (selten: NP-schwierig), NP-vollständig

NP-Complete Problems: Meaning

- NP-hard problems are "at least as difficult" as all problems in NP.
- NP-complete problems are "the most difficult" problems in NP: all problems in NP can be reduced to them.

NP-Complete Problems: Meaning

- NP-hard problems are "at least as difficult" as all problems in NP.
- NP-complete problems are "the most difficult" problems in NP: all problems in NP can be reduced to them.
- If $A \in \mathrm{P}$ for any NP-complete problem, then $\mathrm{P} = \mathrm{NP}$. (Why?)
- That means that either there are efficient algorithms for all NP-complete problems or for none of them.

NP-Complete Problems: Meaning

- NP-hard problems are "at least as difficult" as all problems in NP.
- NP-complete problems are "the most difficult" problems in NP: all problems in NP can be reduced to them.
- If $A \in \mathrm{P}$ for any NP-complete problem, then $\mathrm{P} = \mathrm{NP}$. (Why?)
- That means that either there are efficient algorithms for all NP-complete problems or for none of them.
- Do NP-complete problems actually exist?

Questions

Questions?

Summary

Summary

- P: languages accepted by DTMs in polynomial time
- NP: languages accepted by NTMs in polynomial time
- polynomial reductions: $A \leq_p B$ if
  there is a total function f computable in polynomial time,
  such that for all words w: $w \in A$ iff $f(w) \in B$
- $A \leq_p B$ implies that A is "at most as difficult" as B
- polynomial reductions are transitive
- NP-hard problems B: $A \leq_p B$ for all $A \in \mathrm{NP}$
- NP-complete problems B: $B \in \mathrm{NP}$ and B is NP-hard