Theory of Computer Science

D2. LOOP- and WHILE-Computability

Malte Helmert

University of Basel

April 19, 2017

Overview: Computability Theory

Computability Theory

- imperative models of computation:
  - D1. Turing-Computability
  - D2. LOOP- and WHILE-Computability
  - D3. GOTO-Computability
- functional models of computation:
  - D4. Primitive Recursion and μ-Recursion
  - D5. Primitive/μ-Recursion vs. LOOP-/WHILE-Computability
- undecidable problems:
  - D6. Decidability and Semi-Decidability
  - D7. Halting Problem and Reductions
  - D8. Rice's Theorem and Other Undecidable Problems

  ~~Post's Correspondence Problem~~

  ~~Undecidable Grammar Problems~~

  ~~Gödel's Theorem and Diophantine Equations~~

Further Reading (German)

Literature for this Chapter (German)

Theoretische Informatik – kurz gefasst
by Uwe Schöning (5th edition)

- Chapter 2.3
- Chapter 2.5

Further Reading (English)

Literature for this Chapter (English)

~~Introduction to the Theory of Computation by Michael Sipser (3rd edition)~~

- This topic is not discussed by Sipser!

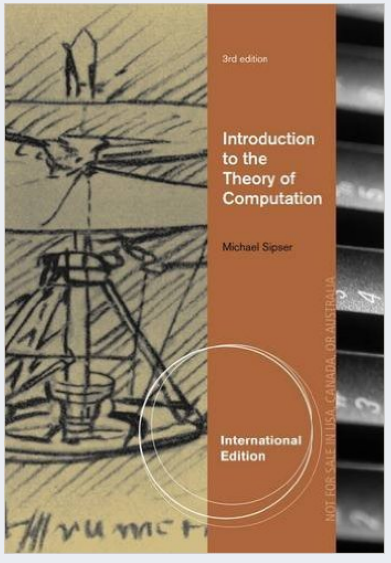

Introduction

Formal Models of Computation: LOOP/WHILE/GOTO

Formal Models of Computation

- Turing machines
- LOOP, WHILE and GOTO programs
- primitive recursive and μ-recursive functions

In this and the following chapter we get to know
three simple models of computation (programming languages)
and compare their power to Turing machines:

- LOOP programs $\rightsquigarrow$ today
- WHILE programs $\rightsquigarrow$ today
- GOTO programs $\rightsquigarrow$ next chapter

LOOP, WHILE and GOTO Programs: Basic Concepts

- LOOP, WHILE and GOTO programs are structured like programs in (simple) "traditional" programming languages
- use finitely many variables from the set $\{x_0, x_1, x_2, \dots\}$ that can take on values in $\mathbb{N}_0$
- differ from each other in the allowed "statements"

LOOP Programs

LOOP Programs: Syntax

Definition (LOOP Program)

LOOP programs are inductively defined as follows:

- $x_i := x_j + c$ is a LOOP program for every $i, j, c \in \mathbb{N}_0$ (addition)
- $x_i := x_j - c$ is a LOOP program for every $i, j, c \in \mathbb{N}_0$ (modified subtraction)
- If P_1 and P_2 are LOOP programs, then so is $P_1;P_2$ (composition)
- If P is a LOOP program, then so is LOOP x_i DO P END for every $i \in \mathbb{N}_0$ (LOOP loop)

German: LOOP-Programm, Addition, modifizierte Subtraktion, Komposition, LOOP-Schleife

LOOP Programs: Semantics

Definition (Semantics of LOOP Programs)

A LOOP program computes a k-ary function $f : \mathbb{N}_0^k \to \mathbb{N}_0$. The computation of $f(n_1, \ldots, n_k)$ works as follows:

1. Initially, the variables $x_1, \ldots, x_k$ hold the values $n_1, \ldots, n_k$. All other variables hold the value 0.
2. During computation, the program modifies the variables as described on the following slides.
3. The result of the computation $(f(n_1, \ldots, n_k))$ is the value of x_0 after the execution of the program.

German: P berechnet f

LOOP Programs: Semantics

Definition (Semantics of LOOP Programs)

effect of $x_i := x_j + c$:

- The variable x_i is assigned the current value of x_j plus c.
- All other variables retain their value.

LOOP Programs: Semantics

Definition (Semantics of LOOP Programs)

effect of $x_i := x_j - c$:

- The variable x_i is assigned the current value of x_j minus c if this value is non-negative.
- Otherwise x_i is assigned the value 0.
- All other variables retain their value.

LOOP Programs: Semantics

Definition (Semantics of LOOP Programs)

effect of $P_1; P_2$:

- First, execute P_1.
  Then, execute P_2 (on the modified variable values).

LOOP Programs: Semantics

Definition (Semantics of LOOP Programs)

effect of LOOP x_i DO P END:

- Let m be the value of variable x_i at the start of execution.
- The program P is executed m times in sequence.

LOOP-Computable Functions

Definition (LOOP-Computable)

A function $f : \mathbb{N}_0^k \to_p \mathbb{N}_0$ is called LOOP-computable if a LOOP program that computes f exists.

German: f ist LOOP-berechenbar

Note: non-total functions are never LOOP-computable.
(Why not?)

LOOP Programs: Example

Example (LOOP program for $f(x_1, x_2)$)

LOOP x_1 DO
  LOOP x_2 DO
    $x_0 := x_0 + 1$
  END
END

Which (binary) function does this program compute?

Questions

Questions?

Syntactic Sugar

Syntactic Sugar or Essential Feature?

- We investigate the power of programming languages and other computation formalisms.
- Rich language features help when writing complex programs.
- Minimalistic formalisms are useful for proving statements over all programs.

$\rightsquigarrow$ conflict of interest!

Idea:

- Use minimalistic core for proofs.
- Use syntactic sugar when writing programs.

German: syntaktischer Zucker

Example: Syntactic Sugar

Example (syntactic sugar)

We propose five new syntax constructs (with the obvious semantics):

- $x_i := x_j$ for $i, j \in \mathbb{N}_0$
- $x_i := c$ for $i, c \in \mathbb{N}_0$
- $x_i := x_j + x_k$ for $i, j, k \in \mathbb{N}_0$
- IF $x_i \neq 0$ THEN P END for $i \in \mathbb{N}_0$
- IF $x_i = c$ THEN P END for $i, c \in \mathbb{N}_0$

Can we simulate these with the existing constructs?

Example: Syntactic Sugar

Example (syntactic sugar)

$x_i := x_j$ for $i, j \in \mathbb{N}_0$

Simulation with existing constructs?

Example: Syntactic Sugar

Example (syntactic sugar)

$x_i := x_j$ for $i, j \in \mathbb{N}_0$

Simple abbreviation for $x_i := x_j + 0$.

Example: Syntactic Sugar

Example (syntactic sugar)

$x_i := c$ for $i, c \in \mathbb{N}_0$

Simulation with existing constructs?

Example: Syntactic Sugar

Example (syntactic sugar)

$x_i := c$ for $i, c \in \mathbb{N}_0$

Simple abbreviation for $x_i := x_j + c$,
where x_j is a fresh variable, i.e., an otherwise unused variable that is not an input variable.
(Thus x_j must always have the value 0 in all executions.)

Example: Syntactic Sugar

Example (syntactic sugar)

$x_i := x_j + x_k$ for $i, j, k \in \mathbb{N}_0$

Simulation with existing constructs?

Example: Syntactic Sugar

Example (syntactic sugar)

$x_i := x_j + x_k$ for $i, j, k \in \mathbb{N}_0$

Abbreviation for:

$x_i := x_j;$
LOOP x_k DO
  $x_i := x_i + 1$
END

Analogously we will also use the following:

- $x_i := x_j - x_k$
- $x_i := x_j + x_k - c - x_m + d$
- etc.

Example: Syntactic Sugar

Example (syntactic sugar)

IF $x_i \neq 0$ THEN P END for $i \in \mathbb{N}_0$

Simulation with existing constructs?

Example: Syntactic Sugar

Example (syntactic sugar)

IF $x_i \neq 0$ THEN P END for $i \in \mathbb{N}_0$

Abbreviation for:

$x_j := 0;$
LOOP x_i DO
  $x_j := 1$
END;
LOOP x_j DO
  P
END

where x_j is a fresh variable.

Example: Syntactic Sugar

Example (syntactic sugar)

IF $x_i = c$ THEN P END for $i, c \in \mathbb{N}_0$

Simulation with existing constructs?

Example: Syntactic Sugar

Example (syntactic sugar)

IF $x_i = c$ THEN P END for $i, c \in \mathbb{N}_0$

Abbreviation for:

$x_j := 1;$
$x_k := x_i - c;$
IF $x_k \neq 0$ THEN $x_j := 0$ END;
$x_k := c - x_i;$
IF $x_k \neq 0$ THEN $x_j := 0$ END;
IF $x_j \neq 0$ THEN
  P
END

where x_j and x_k are fresh variables.

Can We Be More Minimalistic?

- We see that some common structural elements such as IF statements are unnecessary because they are syntactic sugar.
- Can we make LOOP programs even more minimalistic than in our definition?

Can We Be More Minimalistic?

- We see that some common structural elements such as IF statements are unnecessary because they are syntactic sugar.
- Can we make LOOP programs even more minimalistic than in our definition?

Simplification 1

Instead of $x_i := x_j + c$ and $x_i := x_j - c$ it suffices to only allow the constructs

- $x_i := x_j$,
- $x_i := x_i + 1$ and
- $x_i := x_i - 1$.

Why?

Can We Be More Minimalistic?

- We see that some common structural elements such as IF statements are unnecessary because they are syntactic sugar.
- Can we make LOOP programs even more minimalistic than in our definition?

Simplification 2

The construct $x_i := x_j$ can be omitted
because it can be simulated with other constructs:

LOOP x_i DO
  $x_i := x_i - 1$
END;
LOOP x_j DO
  $x_i := x_i + 1$
END

Questions

Questions?

WHILE Programs

WHILE Programs: Syntax

Definition (WHILE Program)

WHILE programs are inductively defined as follows:

- $x_i := x_j + c$ is a WHILE program
  for every $i, j, c \in \mathbb{N}_0$ (addition)
- $x_i := x_j - c$ is a WHILE program
  for every $i, j, c \in \mathbb{N}_0$ (modified subtraction)
- If P_1 and P_2 are WHILE programs,
  then so is $P_1;P_2$ (composition)
- If P is a WHILE program, then so is
  WHILE $x_i \neq 0$ DO P END for every $i \in \mathbb{N}_0$ (WHILE loop)

German: WHILE-Programm, WHILE-Schleife

WHILE Programs: Semantics

Definition (Semantics of WHILE Programs)

The semantics of WHILE programs is defined exactly as for LOOP programs.

effect of WHILE $x_i \neq 0$ DO P END:

- If x_i holds the value 0, program execution finishes.
- Otherwise execute P.
- Repeat these steps until execution finishes (potentially infinitely often).

WHILE-Computable Functions

Definition (WHILE-Computable)

A function $f : \mathbb{N}_0^k \to_p \mathbb{N}_0$ is called WHILE-computable if a WHILE program that computes f exists.

German: f ist WHILE-berechenbar

WHILE-Computability vs. LOOP-Computability

Theorem

Every LOOP-computable function is WHILE-computable.
The converse is not true.

WHILE programs are therefore strictly more powerful than LOOP programs.

German: echt mächtiger

WHILE-Computability vs. LOOP-Computability

Proof.

Part 1: Every LOOP-computable function is WHILE-computable.

Given any LOOP program, we construct an equivalent WHILE program, i. e., one computing the same function.

To do so, replace each occurrence of LOOP x_i DO P END with

$x_j := x_i$;
WHILE $x_j \neq 0$ DO
  $x_j := x_j - 1$;
  P
END

where x_j is a fresh variable. ...

WHILE-Computability vs. LOOP-Computability

Proof (continued).

Part 2: Not all WHILE-computable functions are LOOP-computable.

The WHILE program

$x_1 := 1;$
WHILE $x_1 \neq 0$ DO
  $x_1 := 1$
END

computes the function $\Omega : \mathbb{N}_0 \to_p \mathbb{N}_0$ that is undefined everywhere.

Ω is hence WHILE-computable, but not LOOP-computable (because LOOP-computable functions are always total). □

Questions

Questions?

Digression: the Ackermann Function

LOOP vs. WHILE: Is There a Practical Difference?

- We have shown that WHILE programs are strictly more powerful than LOOP programs.
- The example we used is not very relevant in practice because our argument only relied on the fact that LOOP-computable functions are always total.
- To terminate for every input is not much of a problem in practice. (Quite the opposite.)
- Are there any total functions that are WHILE-computable, but not LOOP-computable?

Ackermann Function: History

- David Hilbert conjectured that all computable total functions are primitive recursive (1926).
  - $\rightsquigarrow$ We will see what this means in Chapter D4.
- Wilhelm Ackermann refuted the conjecture by supplying a counterexample (1928).
- The counterexample was simplified by Rózsa Péter (1935).

$\rightsquigarrow$ here: simplified version

Ackermann Function

Definition (Ackermann function)

The Ackermann function $a : \mathbb{N}_0^2 \to \mathbb{N}_0$ is defined as follows:

$$
\begin{aligned}
a(0, y) &= y + 1 && \text{for all } y \geq 0 \\
a(x, 0) &= a(x - 1, 1) && \text{for all } x > 0 \\
a(x, y) &= a(x - 1, a(x, y - 1)) && \text{for all } x, y > 0
\end{aligned}
$$

German: Ackermannfunktion

Note: the recursion in the definition is bounded, so this defines a total function. (Why?)

Table of Values

	$y = 0$	$y = 1$	$y = 2$	$y = 3$	$y = k$
$a(0, y)$	1	2	3	4	$k + 1$
$a(1, y)$	2	3	4	5	$k + 2$
$a(2, y)$	3	5	7	9	$2k + 3$
$a(3, y)$	5	13	29	61	$2^{k+3} - 3$
$a(4, y)$	13	65533	$2^{65536} - 3$	$2^{2^{65536}} - 3$	$\underbrace{2^{2^{\cdot^{\cdot^{\cdot^{2}}}}}}_{k+3} - 3$

Computability of the Ackermann Function

Theorem

The Ackermann function is WHILE-computable, but not LOOP-computable.

(Without proof.)

Computability of the Ackermann Function: Proof Idea

proof idea:

- WHILE-computability:
  - show how WHILE programs can simulate a stack
    (essentially: push/pop with *encode*/*decode* from Chapter D4)
  - dual recursion by using a stack

  $\rightsquigarrow$ WHILE program is easy to specify
- no LOOP-computability:
  - show that there is a number k for every LOOP program such that the computed function value is smaller than $a(k, n)$, if n is the largest input value
  - proof by structural induction; use $k =$ "program length"

  $\rightsquigarrow$ Ackermann function grows faster than every LOOP-computable function

Questions

Questions?

Summary

Summary: LOOP and WHILE Programs

two new models of computation for numerical functions:

- LOOP programs and WHILE programs
- closer to typical programming languages than Turing machines

Summary: Comparing Models of Computation

general approach to compare power of formalisms:

- How can features be used to simulate other features (cf. syntactic sugar, minimalistic formalisms)?
- How can one formalism simulate the other formalism?

Power of LOOP vs. WHILE

We now know:

- WHILE programs are strictly more powerful than LOOP programs.
- WHILE-, but not LOOP-computable functions:
  - simple example: function that is undefined everywhere
  - more interesting example (total function): Ackermann function, which grows too fast to be LOOP-computable

How do LOOP and WHILE programs relate to Turing machines?

$\rightsquigarrow$ next chapter