

Algorithms and Data Structures


A15. Sorting: Overview & Outlook

Gabriele Röger

University of Basel

March 21, 2024

Content of the Course

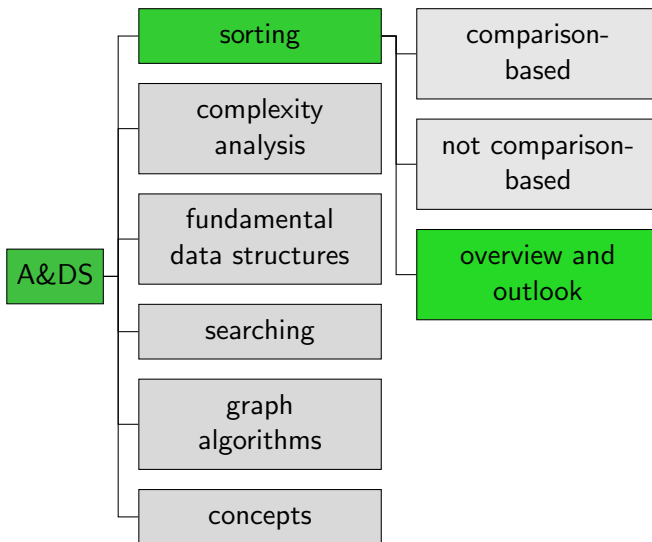

Overview

Comparison-based Sorting: Overview

| Algorithm | Running time $O(\cdot)$ | Memory $O(\cdot)$ | stable |
|----------------|-------------------------|-------------------|--------|
| | best/avg./worst | best/avg./worst | |
| Selection sort | n^2 | 1 | no |
| Insertion sort | $n/n^2/n^2$ | 1 | yes |
| Merge sort | $n \log n$ | n | yes |
| Quicksort | $n \log n/n \log n/n^2$ | $\log n/\log n/n$ | no |
| Heapsort | $n \log n$ | 1 | no |

Comparison-based Sorting: Overview

| Algorithm | Running time $O(\cdot)$ | Memory $O(\cdot)$ | stable |
|----------------|-------------------------|-------------------|--------|
| | best/avg./worst | best/avg./worst | |
| Selection sort | n^2 | 1 | no |
| Insertion sort | $n/n^2/n^2$ | 1 | yes |
| Merge sort | $n \log n$ | n | yes |
| Quicksort | $n \log n/n \log n/n^2$ | $\log n/\log n/n$ | no |
| Heapsort | $n \log n$ | 1 | no |

Very nice [visualization of the algorithms](https://www.toptal.com/developers/sorting-algorithms/) at

<https://www.toptal.com/developers/sorting-algorithms/>

Comparison-based Algorithms: Comments

- **Insertion sort** is **very fast on short sequences** and can be used to improve merge sort or quicksort for short ranges.

Comparison-based Algorithms: Comments

- **Insertion sort** is **very fast on short sequences** and can be used to improve merge sort or quicksort for short ranges.
- **Quicksort** has a very short (= fast) inner loop. With randomization, the worst case almost never happens.

Comparison-based Algorithms: Comments

- **Insertion sort** is **very fast on short sequences** and can be used to improve merge sort or quicksort for short ranges.
- **Quicksort** has a very short (= fast) inner loop. With randomization, the worst case almost never happens.
- **Merge sort** has the advantage of being **stable**.
The merge step is also relevant for external sorting.
Gets for example often used for data base applications.

Comparison-based Algorithms: Comments

- **Insertion sort** is **very fast on short sequences** and can be used to improve merge sort or quicksort for short ranges.
- **Quicksort** has a very short (= fast) inner loop. With randomization, the worst case almost never happens.
- **Merge sort** has the advantage of being **stable**.
The merge step is also relevant for external sorting.
Gets for example often used for data base applications.
- **Heapsort** is in practise slightly slower than merge sort, but interesting because it is an **in-place** approach.
e.g. for embedded systems.

Comparison-based Algorithms: Comments

- **Insertion sort** is **very fast on short sequences** and can be used to improve merge sort or quicksort for short ranges.
- **Quicksort** has a very short (= fast) inner loop. With randomization, the worst case almost never happens.
- **Merge sort** has the advantage of being **stable**.
The merge step is also relevant for external sorting.
Gets for example often used for data base applications.
- **Heapsort** is in practise slightly slower than merge sort, but interesting because it is an **in-place** approach.
e.g. for embedded systems.
- Equal asymptotic running time does not mean that algorithms take equally long (different hidden constants in $O(\cdot)$).
Heapsort needs twice as many comparisons as merge sort.


Outlook

Partially Sorted Data

- Often some subsequences of the input are already sorted (so-called runs).
- Insertion sort directly benefits from this.
- For some other approaches, there are variants that exploit runs, e.g. [natural merge sort](#).

Many Equivalent Keys

- Quite common in practical applications.
e.g. *sorting students by place of residence*
- There are special variants for some algorithms.
- For example, 3-way partitioning in quicksort



Sorting Complex Objects

- Most of the time, we do not want to sort numbers but **complex objects**.
- It would be extremely expensive to move them in memory for every swap.
- **Instead**: Sort elements that only consist of the key and a pointer/reference to the actual object.

Not So Correct Algorithms

INEFFECTIVE SORTS

```
DEFINE HALFHEARTEDMERGESORT(LIST):  
  IF LENGTH(LIST) < 2:  
    RETURN LIST  
  PIVOT = INT(LENGTH(LIST) / 2)  
  A = HALFHEARTEDMERGESORT(LIST[:PIVOT])  
  B = HALFHEARTEDMERGESORT(LIST[PIVOT:])  
  // UMMMMMM  
  RETURN [A, B] // HERE. SORRY.
```

```
DEFINE FASTBOGOSORT(LIST):  
  // AN OPTIMIZED BOGOSORT  
  // RUNS IN  $O(N \log N)$   
  FOR N FROM 1 TO LOG(LENGTH(LIST)):  
    SHUFFLE(LIST):  
    IF ISSORTED(LIST):  
      RETURN LIST  
  RETURN "KERNEL PAGE FAULT (ERROR CODE: 2)"
```

```
DEFINE JOBIINTERVIEWQUICKSORT(LIST):  
  OK SO YOU CHOOSE A PIVOT  
  // HERE
```

```
DEFINE PANICSORT(LIST):  
  IF ISSORTED(LIST):
```

full comic at <https://xkcd.com/1185/>
(CC BY-NC 2.5)

Solve other Problems by Sorting

k-smallest element

- For example, identifying the median ($k = \lfloor n/2 \rfloor$).
- Use quicksort but only perform the recursive call for the relevant range (\rightarrow quickselect).

Solve other Problems by Sorting

k-smallest element

- For example, identifying the median ($k = \lfloor n/2 \rfloor$).
- Use quicksort but only perform the recursive call for the relevant range (\rightarrow quickselect).

Duplicates

- How many different keys are there? Which value is most common? Are there duplicate keys?
- Can be solved directly with quadratic algorithms.
- Or – more clever – sort first and then use a single scan.

Quiz

Quiz



kahoot.it