

Algorithms and Data Structures

A6. Runtime Analysis: Logarithm

Gabriele Röger and Patrick Schneider

University of Basel

February 27, 2025


Algorithms and Data Structures

February 27, 2025 — A6. Runtime Analysis: Logarithm

A6.1 Logarithm

A6.1 Logarithm

Content of the Course

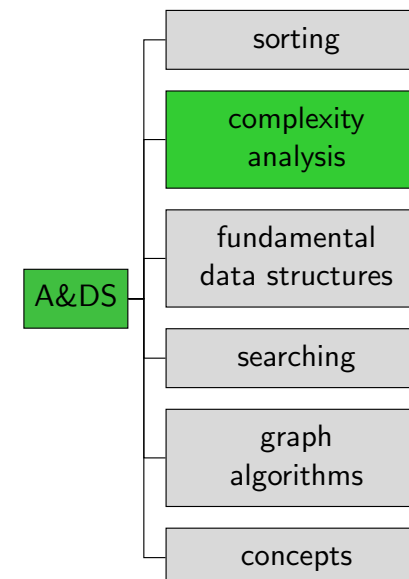


Logarithm

- ▶ For the analysis of merge sort, we will need the **logarithm function**.
- ▶ This is often the case in runtime analysis, in particular for divide-and-conquer algorithms.
- ▶ The logarithm to the base b is the inverse function to exponentiation with base b , i.e.

$$\log_b x = y \text{ iff. } b^y = x.$$

- ▶ Example: $\log_2 8 = 3$, because $2^3 = 8$
- ▶ Example: $\log_3 81 = 4$, because $3^4 = 81$
- ▶ $\log_b a$ intuitively (if this works without remainder):
“How often must we divide a by b to reach 1?”

Logarithm: Illustration

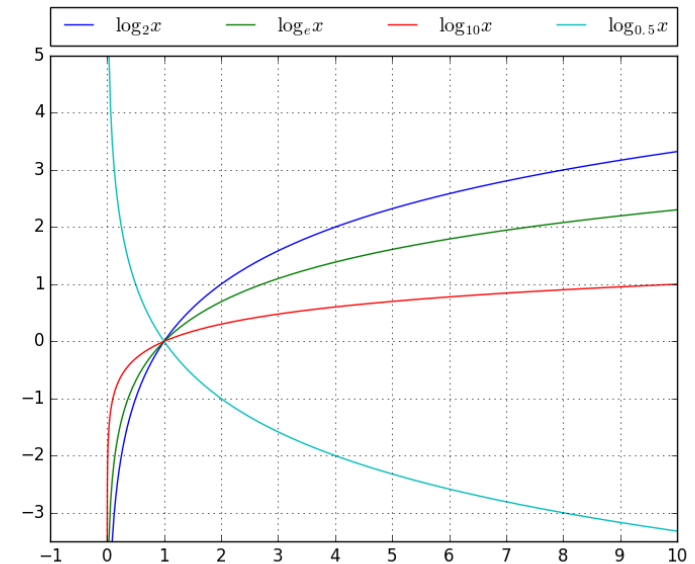

Calculation with Logarithms

The following rules are immediate results of the rules
 $(b^c)^d = b^{cd} = (b^c)^d$ and $b^c b^d = b^{c+d}$:

product	$\log_b(xy) = \log_b x + \log_b y$
power	$\log_b(x^r) = r \log_b x$
change of base	$\log_b x = \log_a x / \log_a b$

Logarithm: Example Calculation

In the analysis of algorithms, we sometimes see expressions of the form $a^{\log_b x}$. How do we get the logarithm out of the exponent?

Example: $5^{\log_2 x}$
 We use $5 = 2^{\log_2 5}$.

$$\begin{aligned}
 5^{\log_2 x} &= (2^{\log_2 5})^{\log_2 x} \\
 &= 2^{\log_2 5 \log_2 x} \\
 &= 2^{\log_2 x \log_2 5} \\
 &= (2^{\log_2 x})^{\log_2 5} \\
 &= x^{\log_2 5} \\
 &\approx x^{2.32}
 \end{aligned}$$