

# Planning and Optimization

## D3. Delete Relaxation: Finding Relaxed Plans

Malte Helmert and Gabriele Röger

Universität Basel

October 24, 2022

# Planning and Optimization


October 24, 2022 — D3. Delete Relaxation: Finding Relaxed Plans

## D3.1 Greedy Algorithm


## D3.2 Optimal Relaxed Plans

## D3.3 Summary

## Content of this Course

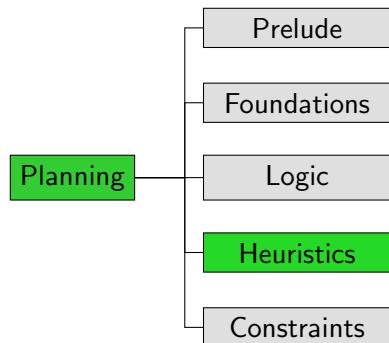

## Content of this Course: Heuristics

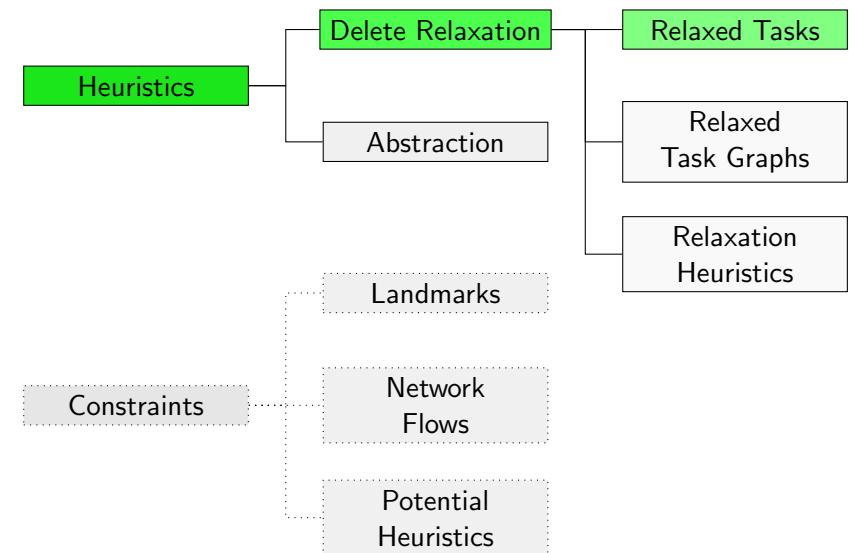

## D3.1 Greedy Algorithm

### Greedy Algorithm for Relaxed Planning Tasks

The relaxation and monotonicity lemmas suggest the following algorithm for solving relaxed planning tasks:

#### Greedy Planning Algorithm for $\langle V, I, O^+, \gamma \rangle$

```

 $s := I$ 
 $\pi^+ := \langle \rangle$ 
loop forever:
  if  $s \models \gamma$ :
    return  $\pi^+$ 
  else if there is an operator  $o^+ \in O^+$  applicable in  $s$ 
    with  $s[o^+] \neq s$ :
      Append such an operator  $o^+$  to  $\pi^+$ .
       $s := s[o^+]$ 
  else:
    return unsolvable
  
```

### The Story So Far

- ▶ A general way to come up with heuristics is to solve a **simplified** version of the real problem.
- ▶ **delete relaxation:** given a task in positive normal form, discard all delete effects
  - ▶ **relaxation lemma:** solutions for a state  $s$  also work for any dominating state  $s'$
  - ▶ **monotonicity lemma:**  $s[o]$  dominates  $s$

### Correctness of the Greedy Algorithm

The algorithm is **sound**:

- ▶ If it returns a plan, this is indeed a correct solution.
- ▶ If it returns “unsolvable”, the task is indeed unsolvable
  - ▶ Upon termination, there clearly is no relaxed plan from  $s$ .
  - ▶ By iterated application of the monotonicity lemma,  $s$  dominates  $I$ .
  - ▶ By the relaxation lemma, there is no solution from  $I$ .

What about **completeness** (termination) and **runtime**?

- ▶ Each iteration of the loop adds at least one atom to  $on(s)$ .
- ▶ This guarantees termination after at most  $|V|$  iterations.
- ▶ Thus, the algorithm can clearly be implemented to run in polynomial time.
  - ▶ A good implementation runs in  $O(\|\Pi\|)$ .

## Using the Greedy Algorithm as a Heuristic

We can apply the greedy algorithm within heuristic search for a general (non-relaxed) planning task:

- ▶ When evaluating a state  $s$  in progression search, solve relaxation of planning task with initial state  $s$ .
- ▶ When evaluating a subgoal  $\varphi$  in regression search, solve relaxation of planning task with goal  $\varphi$ .
- ▶ Set  $h(s)$  to the cost of the generated relaxed plan.
  - ▶ in general not **well-defined**: different choices of  $o^+$  in the algorithm lead to different  $h(s)$

Is this admissible/safe/goal-aware/consistent?

## Properties of the Greedy Algorithm as a Heuristic

Is this an **admissible** heuristic?

- ▶ Yes if the relaxed plans are **optimal** (due to the plan preservation corollary).
- ▶ However, usually they are not, because the greedy algorithm can make poor choices of which operators to apply.

How hard is it to find **optimal** relaxed plans?

## D3.2 Optimal Relaxed Plans

## Optimal Relaxation Heuristic

**Definition ( $h^+$  heuristic)**

Let  $\Pi = \langle V, I, O, \gamma \rangle$  be a planning task in positive normal form with states  $S$ .

The **optimal delete relaxation heuristic  $h^+$**  for  $\Pi$  is the function  $h : S \rightarrow \mathbb{R}_0^+ \cup \{\infty\}$  where  $h(s)$  is the cost of an **optimal relaxed plan** for  $s$ , i.e., of an optimal plan for  $\Pi_s^+ = \langle V, s, O^+, \gamma \rangle$ .

(can analogously define a heuristic for regression)

admissible/safe/goal-aware/consistent?

## The Set Cover Problem

Can we compute  $h^+$  efficiently?

This question is related to the following problem:

### Problem (Set Cover)

*Given:* a finite set  $U$ , a collection of subsets  $C = \{C_1, \dots, C_n\}$  with  $C_i \subseteq U$  for all  $i \in \{1, \dots, n\}$ , and a natural number  $K$ .

*Question:* Is there a set cover of size at most  $K$ , i.e., a subcollection  $S = \{S_1, \dots, S_m\} \subseteq C$  with  $S_1 \cup \dots \cup S_m = U$  and  $m \leq K$ ?

The following is a classical result from complexity theory:

### Theorem (Karp 1972)

The set cover problem is NP-complete.

## Complexity of Optimal Relaxed Planning (1)

### Theorem (Complexity of Optimal Relaxed Planning)

The BCPLANEx problem restricted to delete-relaxed planning tasks is NP-complete.

### Proof.

For membership in NP, guess a plan and verify.

It is sufficient to check plans of length at most  $|V|$  where  $V$  is the set of state variables, so this can be done in nondeterministic polynomial time.

For hardness, we reduce from the set cover problem.

...

## Complexity of Optimal Relaxed Planning (2)

### Proof (continued).

Given a set cover instance  $\langle U, C, K \rangle$ , we generate the following relaxed planning task  $\Pi^+ = \langle V, I, O^+, \gamma \rangle$ :

- ▶  $V = U$
- ▶  $I = \{v \mapsto \mathbf{F} \mid v \in V\}$
- ▶  $O^+ = \{\langle \top, \bigwedge_{v \in C_i} v, 1 \rangle \mid C_i \in C\}$
- ▶  $\gamma = \bigwedge_{v \in U} v$

If  $S$  is a set cover, the corresponding operators form a plan.

Conversely, each plan induces a set cover by taking the subsets corresponding to the operators. There exists a plan of cost at most  $K$  iff there exists a set cover of size  $K$ .

Moreover,  $\Pi^+$  can be generated from the set cover instance in polynomial time, so this is a polynomial reduction. □

## D3.3 Summary

## Summary

- ▶ Because of their monotonicity property, delete-relaxed tasks can be solved in **polynomial time** by a **greedy algorithm**.
- ▶ However, the solution quality of this algorithm is poor.
- ▶ For an informative heuristic, we would ideally want to find **optimal relaxed plans**.
- ▶ The solution cost of an optimal relaxed plan is the estimate of the  $h^+$  heuristic.
- ▶ However, the bounded-cost plan existence problem for relaxed planning tasks is **NP-complete**.